

BMH1901P21A2A

servo motor BMH - 30 Nm - 5000 rpm -
untapped shaft - without brake- IP65/IP67





Main

Product or component type	Servo motor
Device short name	BMH
Maximum mechanical speed	4000 rpm
Continuous stall torque	30 N.m for LXM32.D72N4 24 A at 400 V three phase 30 N.m for LXM32.D72N4 24 A at 480 V three phase 30 N.m for LXM32MD85N4 32 A at 400 V three phase 30 N.m for LXM32MD85N4 32 A at 480 V three phase 30 N.m for LXM32MC10N4 40 A at 400 V three phase 30 N.m for LXM32MC10N4 40 A at 480 V three phase
Peak stall torque	77.7 N.m for LXM32.D72N4 24 A at 400 V three phase 77.7 N.m for LXM32.D72N4 24 A at 480 V three phase 86.6 N.m for LXM32MD85N4 32 A at 400 V three phase 86.6 N.m for LXM32MD85N4 32 A at 480 V three phase 89.7 N.m for LXM32MC10N4 40 A at 400 V three phase 89.7 N.m for LXM32MC10N4 40 A at 480 V three phase
Nominal output power	4800 W for LXM32.D72N4 24 A at 400 V three phase 4800 W for LXM32.D72N4 24 A at 480 V three phase 5180 W for LXM32MD85N4 32 A at 400 V three phase 5180 W for LXM32MD85N4 32 A at 480 V three phase 5180 W for LXM32MC10N4 40 A at 400 V three phase 5180 W for LXM32MC10N4 40 A at 480 V three phase
Nominal torque	18.4 N.m for LXM32.D72N4 24 A at 400 V three phase 18.4 N.m for LXM32.D72N4 24 A at 480 V three phase 16.5 N.m for LXM32MD85N4 32 A at 400 V three phase 16.5 N.m for LXM32MD85N4 32 A at 480 V three phase 16.5 N.m for LXM32MC10N4 40 A at 400 V three phase 16.5 N.m for LXM32MC10N4 40 A at 480 V three phase
Nominal speed	2500 rpm for LXM32.D72N4 24 A at 400 V three phase 2500 rpm for LXM32.D72N4 24 A at 480 V three phase 3000 rpm for LXM32MD85N4 32 A at 400 V three phase 3000 rpm for LXM32MD85N4 32 A at 480 V three phase 3000 rpm for LXM32MC10N4 40 A at 400 V three phase 3000 rpm for LXM32MC10N4 40 A at 480 V three phase
Product compatibility	LXM32.D72N4 at 400...480 V three phase
Shaft end	Untapped
IP degree of protection	IP65 (standard) IP67 (with IP67 kit)
Speed feedback resolution	131072 points/turn

Holding brake	Without
Mounting support	International standard flange
Electrical connection	Rotatable right-angled connectors

Complementary

Range compatibility	Lexium 32
[Us] rated supply voltage	480 V
Network number of phases	Three phase
Continuous stall current	23.2 A
Continuous power	5.24 W
Maximum current I _{rms}	72 A for LXM32.D72N4
Maximum permanent current	89.6 A
Second shaft	Without second shaft end
Shaft diameter	38 mm
Shaft length	80 mm
Feedback type	Single turn SinCos Hiperface
Motor flange size	190 mm
Number of motor stacks	1
Torque constant	1.3 N.m/A at 120 °C
Back emf constant	87.6 V/krpm at 120 °C
Number of motor poles	10
Rotor inertia	67.7 kg.cm ²
Stator resistance	0.24 Ohm at 20 °C
Stator inductance	5.08 mH at 20 °C
Stator electrical time constant	21.2 ms at 20 °C
Maximum radial force Fr	3730 N at 1000 rpm
Maximum axial force Fa	0.2 x Fr
Type of cooling	Natural convection
Length	190 mm
Centring collar diameter	180 mm
Centring collar depth	4 mm
Number of mounting holes	4
Mounting holes diameter	14 mm
Circle diameter of the mounting holes	215 mm
Product weight	19 kg

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1101 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available Download Product Environmental
Product end of life instructions	Need no specific recycling operations

[illegible]

- Dimensions in mm

c (without brake)	c (with brake)	c1 (without brake)	c1 (with brake)
190	248	65	123


Dimensions in in.

c (without brake)	c (with brake)	c1 (without brake)	c1 (with brake)
7.48	9.76	2.56	4.84

Torque/Speed Curves

400 V 3-Phase Supply Voltage


Servo motor with LXM32-D72N4 servo drive

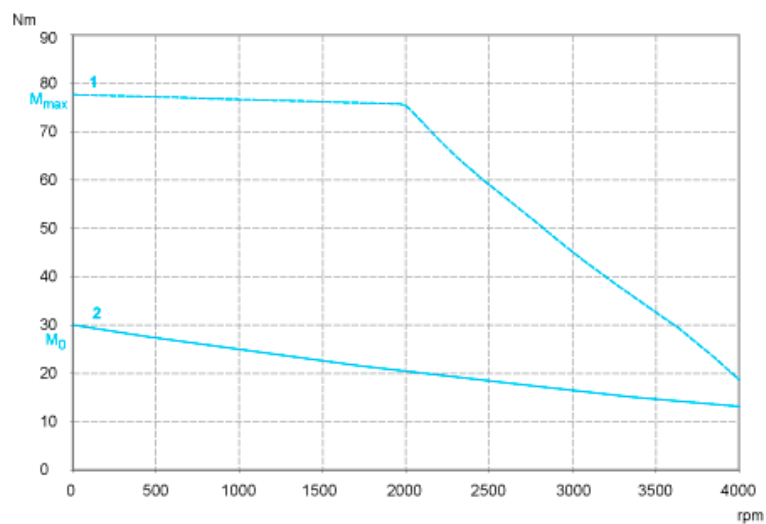

- (1) Peak torque
- (2) Continuous torque

480 V 3-Phase Supply Voltage

Servo motor with LXM32-D72N4 servo drive

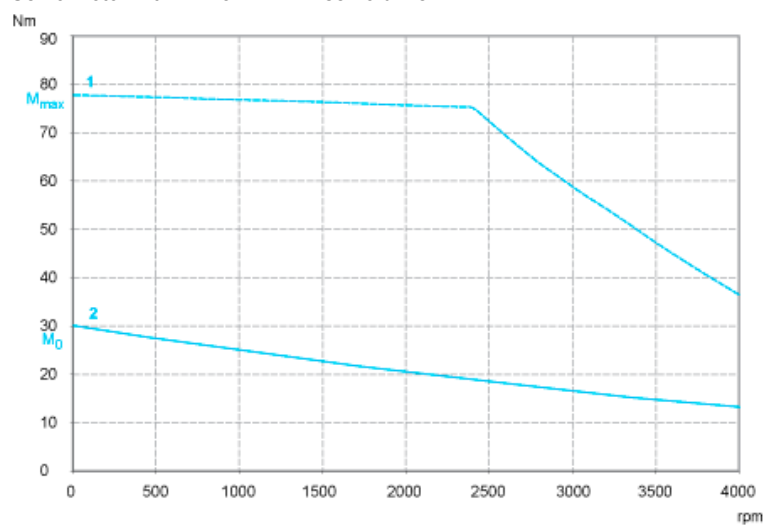

- (1) Peak torque
- (2) Continuous torque