



Main

Range of product	Modicon M340 automation platform
Product or component type	Ethernet TCP/IP network module
Product specific application	For severe environments
Concept	Transparent Ready
Integrated connection type	Ethernet TCP/IP RJ45 10/100 Mbit/s 1 twisted pair transparent ready class C30
Protective treatment	Conformal coating Humiseal 1A33 TC
Environmental characteristic	3C3 conforming to EN/IEC 60721-3-3 3C4 conforming to EN/IEC 60721-3-3

Complementary

Communication service	Bandwidth management FDR server Rack Viewer SNMP network administrator Global Data I/O scanning Modbus TCP messaging Web server configurable Data Editor (via PC, pocket PC or PDA terminal) SOAP XML Web service (server)
Port Ethernet	10BASE-T/100BASE-TX
Memory description	Supplied Flash memory card (BMXRWSC016M) Internal RAM 16000 kB
Memory usage	User web page size: internal RAM Activating the standard web server: supplied Flash memory card (BMXRWSC016M) Application saving: supplied Flash memory card (BMXRWSC016M)
Supply	Internal power supply via rack
Local signalling	1 LED green activity on Ethernet network (ETH ACT) 1 LED green processor running (RUN) 1 LED green status of Ethernet network (ETH STS) 1 LED red data rate (ETH 100) 1 LED red memory card fault (CARD ERR) 1 LED red processor or system fault (ERR)
Control type	RESET push-button cold restart
Current consumption	90 mA at 24 V DC
Module format	Standard
Product weight	0.2 kg

Environment

Ambient air temperature for operation	-25...70 °C
Relative humidity	10...95 % without condensation
IP degree of protection	IP20
Marking	CE
Product certifications	UL 508
Standards	CSA C22.2 No 142 EN/IEC 61131-2 CSA C22.2 No 213 Class I Division 2

Offer Sustainability


Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0901 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available Download Product Environmental

Contractual warranty

Warranty period	18 months
-----------------	-----------

Modules Mounted on Racks

Dimensions

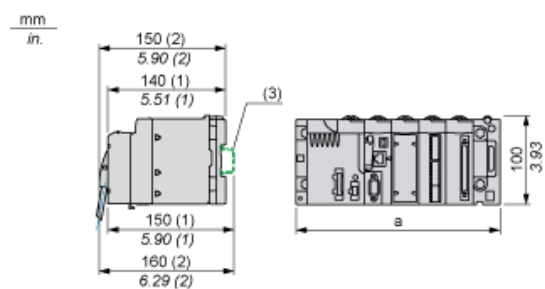

- (1) With removable terminal block (cage, screw or spring).
 (2) With FCN connector.
 (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81