

# BSH1002P21F1A

AC servo motor BSH - 3.4 N.m - 2500 rpm -  
untapped shaft - with brake - IP65



## Main

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product or component type | Servo motor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Device short name         | BSH                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Maximum mechanical speed  | 6000 rpm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Continuous stall torque   | <p>4.5 N.m for LXM15LD21M3, 230 V, single phase</p> <p>3.4 N.m for LXM15LD13M3, 230 V, three phase</p> <p>3.4 N.m for LXM15LD10N4, 230 V, three phase</p> <p>3.4 N.m for LXM15LD10N4, 400 V, three phase</p> <p>3.4 N.m for LXM15LD10N4, 480 V, three phase</p> <p>5.8 N.m for LXM15LD17N4, 400 V, three phase</p> <p>5.8 N.m for LXM15LD17N4, 480 V, three phase</p> <p>5.8 N.m for LXM15LD21M3, 230 V, three phase</p> <p>5.5 N.m for LXM05AD17M3X, 200...240 V, three phase</p> <p>5.5 N.m for LXM05AD22N4, 380...480 V, three phase</p> <p>5.5 N.m for LXM05AD28M2, 200...240 V, single phase</p> <p>5.5 N.m for LXM05BD17M3X, 200...240 V, three phase</p> <p>5.5 N.m for LXM05BD22N4, 380...480 V, three phase</p> <p>5.5 N.m for LXM05BD28M2, 200...240 V, single phase</p> <p>5.5 N.m for LXM05CD17M3X, 200...240 V, three phase</p> <p>5.5 N.m for LXM05CD22N4, 380...480 V, three phase</p> <p>5.5 N.m for LXM05CD28M2, 200...240 V, single phase</p> <p>5.8 N.m for LXM32.D18N4 at 6 A, 400 V, three phase</p> <p>5.8 N.m for LXM32.D18N4 at 6 A, 480 V, three phase</p>             |
| Peak stall torque         | <p>9.39 N.m for LXM15LD21M3, 230 V, single phase</p> <p>5.6 N.m for LXM15LD13M3, 230 V, three phase</p> <p>8 N.m for LXM15LD10N4, 230 V, three phase</p> <p>8 N.m for LXM15LD10N4, 400 V, three phase</p> <p>8 N.m for LXM15LD10N4, 480 V, three phase</p> <p>12.13 N.m for LXM15LD17N4, 400 V, three phase</p> <p>12.13 N.m for LXM15LD17N4, 480 V, three phase</p> <p>14.79 N.m for LXM15LD21M3, 230 V, three phase</p> <p>11.23 N.m for LXM05AD17M3X, 200...240 V, three phase</p> <p>13.92 N.m for LXM05AD22N4, 380...480 V, three phase</p> <p>16 N.m for LXM05AD28M2, 200...240 V, single phase</p> <p>11.23 N.m for LXM05BD17M3X, 200...240 V, three phase</p> <p>13.92 N.m for LXM05BD22N4, 380...480 V, three phase</p> <p>16 N.m for LXM05BD28M2, 200...240 V, single phase</p> <p>11.23 N.m for LXM05CD17M3X, 200...240 V, three phase</p> <p>13.92 N.m for LXM05CD22N4, 380...480 V, three phase</p> <p>16 N.m for LXM05CD28M2, 200...240 V, single phase</p> <p>18.3 N.m for LXM32.D18N4 at 6 A, 400 V, three phase</p> <p>18.3 N.m for LXM32.D18N4 at 6 A, 480 V, three phase</p> |
| Nominal output power      | <p>950 W for LXM15LD21M3, 230 V, single phase</p> <p>950 W for LXM15LD21M3, 230 V, three phase</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                       | 780 W for LXM05AD28M2, 200...240 V, single phase<br>780 W for LXM05BD28M2, 200...240 V, single phase<br>780 W for LXM05CD28M2, 200...240 V, single phase<br>1400 W for LXM05AD22N4, 380...480 V, three phase<br>1400 W for LXM05BD22N4, 380...480 V, three phase<br>1400 W for LXM05CD22N4, 380...480 V, three phase<br>1600 W for LXM15LD10N4, 400 V, three phase<br>1700 W for LXM15LD17N4, 400 V, three phase<br>1950 W for LXM15LD17N4, 480 V, three phase<br>2150 W for LXM15LD10N4, 480 V, three phase<br>780 W for LXM05AD17M3X, 200...240 V, three phase<br>780 W for LXM05BD17M3X, 200...240 V, three phase<br>780 W for LXM05CD17M3X, 200...240 V, three phase<br>840 W for LXM15LD13M3, 230 V, three phase<br>890 W for LXM15LD10N4, 230 V, three phase<br>1700 W for LXM32.D18N4 at 6 A, 400 V, three phase<br>1700 W for LXM32.D18N4 at 6 A, 480 V, three phase                                                                                                                                            |
| Nominal torque        | 4.5 N.m for LXM15LD21M3, 230 V, single phase<br>4.96 N.m for LXM05AD28M2, 200...240 V, single phase<br>4.96 N.m for LXM05BD28M2, 200...240 V, single phase<br>4.96 N.m for LXM05CD28M2, 200...240 V, single phase<br>3.4 N.m for LXM15LD10N4, 230 V, three phase<br>3.4 N.m for LXM15LD10N4, 400 V, three phase<br>3.4 N.m for LXM15LD10N4, 480 V, three phase<br>3.4 N.m for LXM15LD13M3, 230 V, three phase<br>3.7 N.m for LXM15LD17N4, 480 V, three phase<br>4 N.m for LXM15LD17N4, 400 V, three phase<br>4.4 N.m for LXM05AD22N4, 380...480 V, three phase<br>4.4 N.m for LXM05BD22N4, 380...480 V, three phase<br>4.4 N.m for LXM05CD22N4, 380...480 V, three phase<br>4.96 N.m for LXM05AD17M3X, 200...240 V, three phase<br>4.96 N.m for LXM05BD17M3X, 200...240 V, three phase<br>4.96 N.m for LXM05CD17M3X, 200...240 V, three phase<br>5.8 N.m for LXM15LD21M3, 230 V, three phase<br>4 N.m for LXM32.D18N4 at 6 A, 400 V, three phase<br>4 N.m for LXM32.D18N4 at 6 A, 480 V, three phase                    |
| Nominal speed         | 3000 rpm for LXM05AD22N4, 380...480 V, three phase<br>3000 rpm for LXM05BD22N4, 380...480 V, three phase<br>3000 rpm for LXM05CD22N4, 380...480 V, three phase<br>1500 rpm for LXM05AD17M3X, 200...240 V, three phase<br>1500 rpm for LXM05BD17M3X, 200...240 V, three phase<br>1500 rpm for LXM05CD17M3X, 200...240 V, three phase<br>4500 rpm for LXM15LD10N4, 400 V, three phase<br>6000 rpm for LXM15LD10N4, 480 V, three phase<br>4000 rpm for LXM32.D18N4 at 6 A, 400 V, three phase<br>4000 rpm for LXM32.D18N4 at 6 A, 480 V, three phase<br>1500 rpm for LXM05AD28M2, 200...240 V, single phase<br>1500 rpm for LXM05BD28M2, 200...240 V, single phase<br>1500 rpm for LXM05CD28M2, 200...240 V, single phase<br>2000 rpm for LXM15LD21M3, 230 V, single phase<br>2000 rpm for LXM15LD21M3, 230 V, three phase<br>2500 rpm for LXM15LD10N4, 230 V, three phase<br>2500 rpm for LXM15LD13M3, 230 V, three phase<br>4000 rpm for LXM15LD17N4, 400 V, three phase<br>5000 rpm for LXM15LD17N4, 480 V, three phase |
| Product compatibility | LXM05AD28M2 at 200...240 V single phase<br>LXM05BD28M2 at 200...240 V single phase<br>LXM05CD28M2 at 200...240 V single phase<br>LXM15LD21M3 at 230 V single phase<br>LXM15LD13M3 at 230 V three phase<br>LXM15LD10N4 at 400 V three phase<br>LXM05AD17M3X at 200...240 V three phase<br>LXM05BD17M3X at 200...240 V three phase<br>LXM05CD17M3X at 200...240 V three phase<br>LXM15LD10N4 at 230 V three phase<br>LXM15LD10N4 at 480 V three phase<br>LXM15LD21M3 at 230 V three phase<br>LXM05AD22N4 at 380...480 V three phase<br>LXM05BD22N4 at 380...480 V three phase<br>LXM05CD22N4 at 380...480 V three phase<br>LXM15LD17N4 at 400 V three phase<br>LXM15LD17N4 at 480 V three phase<br>LXM32.D18N4 at 400 V three phase<br>LXM32.D18N4 at 480 V three phase                                                                                                                                                                                                                                                   |

|                           |                                     |
|---------------------------|-------------------------------------|
| Shaft end                 | Untapped                            |
| IP degree of protection   | IP65 standard<br>IP67 with IP67 kit |
| Speed feedback resolution | 131072 points/turn                  |
| Holding brake             | With                                |
| Mounting support          | International standard flange       |
| Electrical connection     | Straight connectors                 |

## Complementary

|                                 |                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range compatibility             | Lexium 05<br>Lexium 15<br>Lexium 32                                                                                                                                                                                                                                                                                                                                         |
| Supply voltage max              | 480 V                                                                                                                                                                                                                                                                                                                                                                       |
| Network number of phases        | Three phase                                                                                                                                                                                                                                                                                                                                                                 |
| Continuous stall current        | 4.8 A                                                                                                                                                                                                                                                                                                                                                                       |
| Maximum continuous power        | 2.51 W                                                                                                                                                                                                                                                                                                                                                                      |
| Maximum current Irms            | 17.1 A for LXM15LD13M3<br>17.1 A for LXM15LD21M3<br>17.1 A for LXM15LD10N4<br>17.1 A for LXM15LD17N4<br>17.1 A for LXM05AD28M2<br>17.1 A for LXM05AD17M3X<br>17.1 A for LXM05AD22N4<br>17.1 A for LXM05BD28M2<br>17.1 A for LXM05BD17M3X<br>17.1 A for LXM05BD22N4<br>17.1 A for LXM05CD28M2<br>17.1 A for LXM05CD17M3X<br>17.1 A for LXM05CD22N4<br>17.1 A for LXM32.D18N4 |
| Maximum permanent current       | 17.1 A                                                                                                                                                                                                                                                                                                                                                                      |
| Switching frequency             | 8 kHz                                                                                                                                                                                                                                                                                                                                                                       |
| Second shaft                    | Without second shaft end                                                                                                                                                                                                                                                                                                                                                    |
| Shaft diameter                  | 19 mm                                                                                                                                                                                                                                                                                                                                                                       |
| Shaft length                    | 40 mm                                                                                                                                                                                                                                                                                                                                                                       |
| Feedback type                   | Single turn SinCos Hiperface                                                                                                                                                                                                                                                                                                                                                |
| Holding torque                  | 9 N.m holding brake                                                                                                                                                                                                                                                                                                                                                         |
| Motor flange size               | 100 mm                                                                                                                                                                                                                                                                                                                                                                      |
| Number of motor stacks          | 2                                                                                                                                                                                                                                                                                                                                                                           |
| Torque constant                 | 1.21 N.m/A at 120 °C                                                                                                                                                                                                                                                                                                                                                        |
| Back emf constant               | 77 V/krpm at 120 °C                                                                                                                                                                                                                                                                                                                                                         |
| Number of motor poles           | 8                                                                                                                                                                                                                                                                                                                                                                           |
| Rotor inertia                   | 2.928 kg.cm <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                    |
| Stator resistance               | 2.4 Ohm at 20 °C                                                                                                                                                                                                                                                                                                                                                            |
| Stator inductance               | 12.7 mH at 20 °C                                                                                                                                                                                                                                                                                                                                                            |
| Stator electrical time constant | 5.29 ms at 20 °C                                                                                                                                                                                                                                                                                                                                                            |
| Maximum radial force Fr         | 620 N at 4000 rpm<br>690 N at 3000 rpm<br>790 N at 2000 rpm<br>990 N at 1000 rpm                                                                                                                                                                                                                                                                                            |
| Maximum axial force Fa          | 0.2 x Fr                                                                                                                                                                                                                                                                                                                                                                    |
| Brake pull-in power             | 18 W                                                                                                                                                                                                                                                                                                                                                                        |
| Type of cooling                 | Natural convection                                                                                                                                                                                                                                                                                                                                                          |
| Length                          | 235.5 mm                                                                                                                                                                                                                                                                                                                                                                    |
| Centring collar diameter        | 95 mm                                                                                                                                                                                                                                                                                                                                                                       |
| Centring collar depth           | 3.5 mm                                                                                                                                                                                                                                                                                                                                                                      |
| Number of mounting holes        | 4                                                                                                                                                                                                                                                                                                                                                                           |
| Mounting holes diameter         | 9 mm                                                                                                                                                                                                                                                                                                                                                                        |


|                                       |        |
|---------------------------------------|--------|
| Circle diameter of the mounting holes | 115 mm |
| Product weight                        | 6.3 kg |

### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Servo Motors Dimensions

Example with Straight Connectors

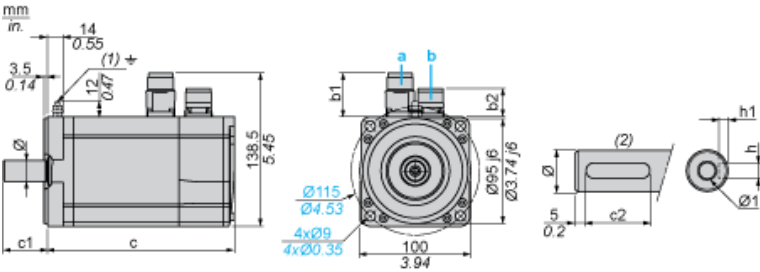

- a: Power supply for servo motor brake  
b: Power supply for servo motor encoder  
(1) M4 screw  
(2) Shaft end, keyed slot (optional)

Dimensions in mm

| Straight connectors |      | Rotatable angled connectors |      | c (without brake) | c (with brake) | c1 | c2 | h    | h1             | Ø     | Ø1 for screws |
|---------------------|------|-----------------------------|------|-------------------|----------------|----|----|------|----------------|-------|---------------|
| b1                  | b2   | b1                          | b2   |                   |                |    |    |      |                |       |               |
| 39.5                | 25.5 | 39.5                        | 39.5 | 205               | 236            | 40 | 30 | 6 N9 | $3.5^{+0.1}_0$ | 19 k6 | M6 x 16       |


Dimensions in in.

| Straight connector |      | Rotatable angled connector |      | c (without brake) | c (with brake) | c1   | c2   | h       | h1              | Ø       | Ø1 for screws |
|--------------------|------|----------------------------|------|-------------------|----------------|------|------|---------|-----------------|---------|---------------|
| b1                 | b2   | b1                         | b2   |                   |                |      |      |         |                 |         |               |
| 1.55               | 1.00 | 1.55                       | 1.55 | 8.07              | 9.29           | 1.57 | 1.18 | 0.24 N9 | $0.14^{+0.1}_0$ | 0.75 k6 | M6 x 0.63     |

400 V 3-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D18N4 servo drive

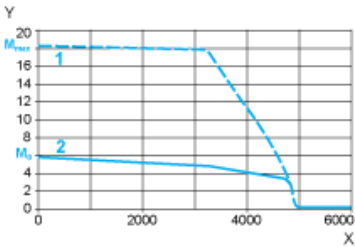

- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque


---

480 V 3-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32•D18N4 servo drive

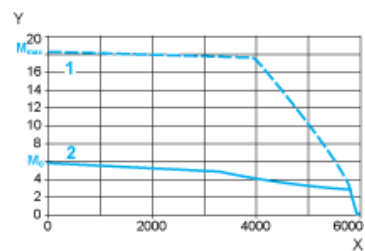

X Speed in rpm  
Y Torque in Nm  
1 Peak torque  
2 Continuous torque