


BD01-AK2M1/2SD163FIA161 TAP-OFF UNIT

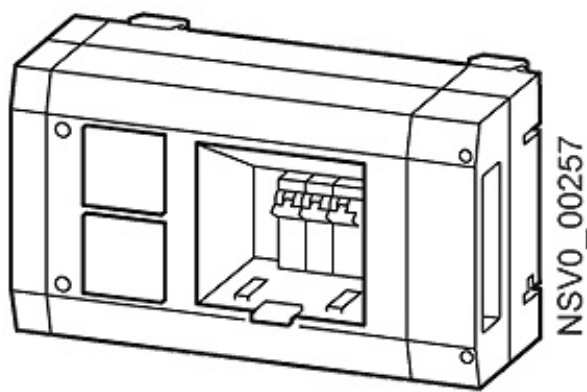

Similar to image

General technical details:		
Product designation		tap-off unit for BD01 busbar trunking system
Product-type designation		BD01-AK2M1/2SD163FIA161
Product function / phase selection		No
Operating current		
• for circuit 1		
• at 50 Hz / for AC / rated value / maximum	A	16
• at 60 Hz / for AC / rated value / maximum	A	16
Release fault-current / rated value	mA	30
Operating frequency		
• rated value	Hz	50 ... 60
Operating voltage		
• at 50 Hz / at AC / rated value / maximum	V	230
• at 60 Hz / at AC / rated value / maximum	V	230
Number of CEE sockets		0
Number of safety sockets		2
Number of width units		8
Number of other sockets		0
Tripping characteristic class		B

Mechanical design:

Execution of short-circuit and overloading protection / in the outgoing unit		1-pole 16 A miniature circuit-breaker and 2-pole 16 A/30 mA RCCB
Design of the socket		16 A schuko socket
Product component / locking		Yes
Product component / outgoing unit for mounting in devices		Yes
Length	mm	265
Width	mm	160
Height	mm	137
Color		light grey
RAL color number		RAL 7035

Outgoing unit:

Design of the outgoing unit		socket
Size of the outgoing feeder		2
Number of poles / of the outgoing feeder		5

Ambient conditions:

Protection class IP		IP54
---------------------	--	------

Further information:**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

Global Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/BVP:034276/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:034276

last change:

Jul 7, 2014