


BD01-GK2X/2SD163CEE165 TAP-OFF UNIT

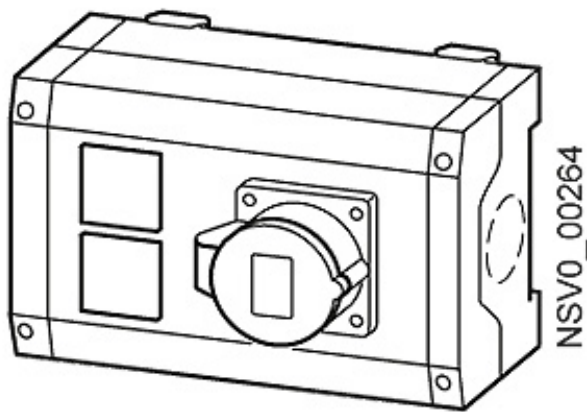

Similar to image

General technical details:		
Product-type designation		BD01-GK2X/2SD163CEE165
Product designation		ancillary equipment unit for BD01 busbar trunking system
Operating current • for circuit 1 • at 50 Hz / for AC / rated value / maximum	A	16
Product function / phase selection		No
Operating voltage • at 50 Hz / at AC / rated value / maximum • at 60 Hz / at AC / rated value / maximum	V V	400 400
Apparent loss power / maximum	V·A	16
Number of CEE sockets		1
Number of safety sockets		2
Number of width units		8
Number of other sockets		0
Number of conductors / without PE		5
Mechanical design:		
Design of the socket		16 A schuko socket, 5-pole 16 A CEE socket

Product component		
• locking		Yes
• outgoing unit for mounting in devices		No
Length	mm	175
Width	mm	160
Height	mm	176
Color		light grey
RAL color number		RAL 7035

Outgoing unit:

Design of the outgoing unit		socket
Size of the outgoing feeder		2

Ambient conditions:

Protection class IP		IP54
----------------------------	--	------

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Global Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/BVP:034291/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:034291

last change:

Sep 3, 2012