


BD2A-250-EE BD2A END FEEDER UNIT WITH ACC.
250A

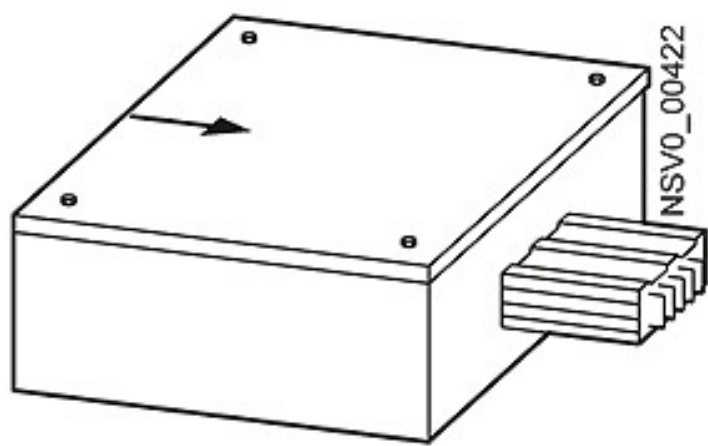

Model		
Product designation		feeder unit for BD2 busbar trunking system
Protection class		
Protection class IP		IP54
Main circuit		
Operating frequency / rated value		
• minimum	Hz	50
• maximum	Hz	60
Operating voltage / at AC		
• at 50 Hz / rated value / maximum	V	690
• at 60 Hz / rated value / maximum	V	690
Operating current		
• for circuit 1 / at AC / at 50 Hz / rated value / maximum	A	250
• for circuit 1 / at AC / at 60 Hz / rated value / maximum	A	250
Connections		

Connectable conductor cross-section / in the feeder box		
• minimum	mm ²	6
• maximum	mm ²	150

Mechanical Design

Height	mm	144
Width	mm	290
Length	mm	563
Mounting type		ceiling / wall
Material / of the busbar		aluminium

Declaration of Conformity



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/BVP:261993>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/BVP:261993/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:261993

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

last modified:

05.02.2016