


BD2-AK1/2SD163FIA161 TAP-OFF UNIT 16A / 2X1P
MCB(B)+ + 2P FI + 2XSD

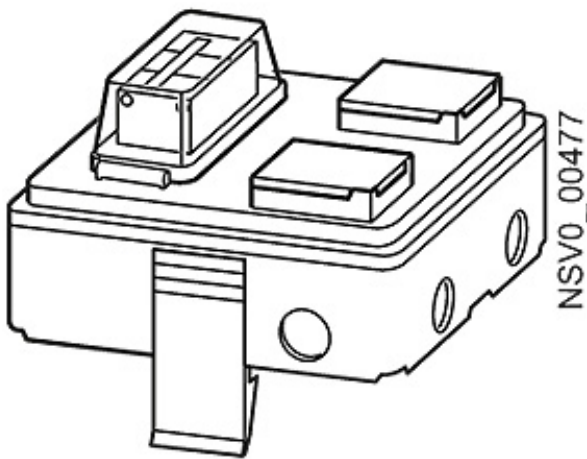

Similar to image

General technical details:		
Product designation		tap-off unit for BD2 busbar trunking system
Product-type designation		BD2-AK1/2SD163FIA161
Product function / phase selection		No
Operating current		
• for circuit 1		
• at 50 Hz / for AC / rated value / maximum	A	16
• at 60 Hz / for AC / rated value / maximum	A	16
Release fault-current / rated value	mA	30
Operating frequency		
• rated value	Hz	50 ... 60
Operating voltage		
• at 50 Hz / at AC / rated value / maximum	V	230
• at 60 Hz / at AC / rated value / maximum	V	230
Number of CEE sockets		0
Number of safety sockets		2
Number of width units		4
Number of other sockets		0
Number of conductors / without PE		0

Tripping characteristic class		B
-------------------------------	--	---

Mechanical design:

Design of the socket		16 A schuko socket
Product component / locking		Yes
Length	mm	190
Width	mm	170
Height	mm	180
Color		light grey
RAL color number		RAL 7035
Product component / outgoing unit for mounting in devices		Yes

Outgoing unit:

Design of the outgoing unit		socket
Execution of short-circuit and overloading protection / in the outgoing unit		1x1-pole miniature circuit breaker 16A and 2-pole RCCB 25A/30mA
Size of the outgoing feeder		1
Number of poles / of the outgoing feeder		5

Ambient conditions:

Protection class IP		IP54
---------------------	--	------

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Global Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/BVP:660870/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:660870

last change:

Jul 7, 2014