




Speed monitor

D100/230VAC

Status Archive

DD0203

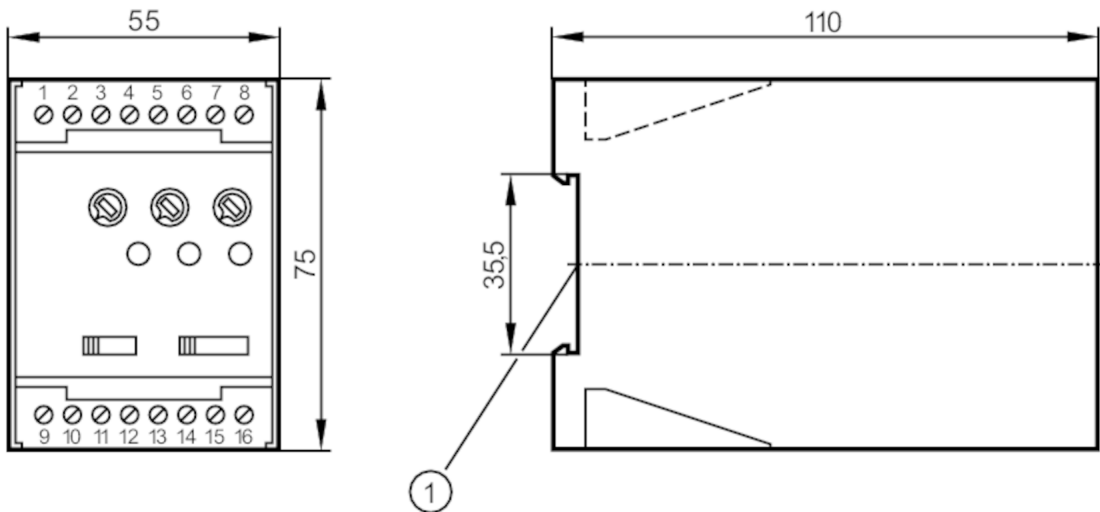

1 mounting on DIN rail



Application		
Application	universal evaluation of pulse sequences with regard to overspeed and underspeed; rotational speed monitoring	
Electrical data		
Nominal voltage AC	[V]	< 230
Nominal voltage DC	[V]	24
Nominal voltage tolerance	[%]	10
Nominal voltage tolerance 2	[%]	10
Nominal frequency AC	[Hz]	50...60
Auxiliary energy for sensors DC	[V]	24; (≤ 30 mA)
Inputs / outputs		
Number of inputs and outputs	Number of relay outputs: 1	
Outputs		
Number of relay outputs	1	
Contact rating	8 A / 1250 VA / 250 V AC	
Detection zone		
Sensing range adjustable	no	
Measuring/setting range		
Setting range	[Imp/min]	5...5000
Accuracy / deviations		
Hysteresis	[% of Sr]	5...100
Repeatability	[% of Sr]	1

DD0001



Speed monitor

D100/230VAC

Response times		
Start-up delay	[s]	0.5...15
Software / programming		
Adjustment of the switch point	fine adjustment within the range with potentiometer	
Operating conditions		
Ambient temperature	[°C]	-20...70
Protection		IP 40
Protection rating terminals		IP 20
Tests / approvals		
MTTF	[years]	468
Mechanical data		
Weight	[g]	0.42
Housing	housing for DIN rail mounting	
Dimensions	[mm]	75 x 55 x 110
Materials	plastics	
Displays / operating elements		
Display	switching status	LED, green
	operation	1 x LED, green
Remarks		
Notes	discontinued article	




Speed monitor

D100/230VAC

Electrical connection

Connection

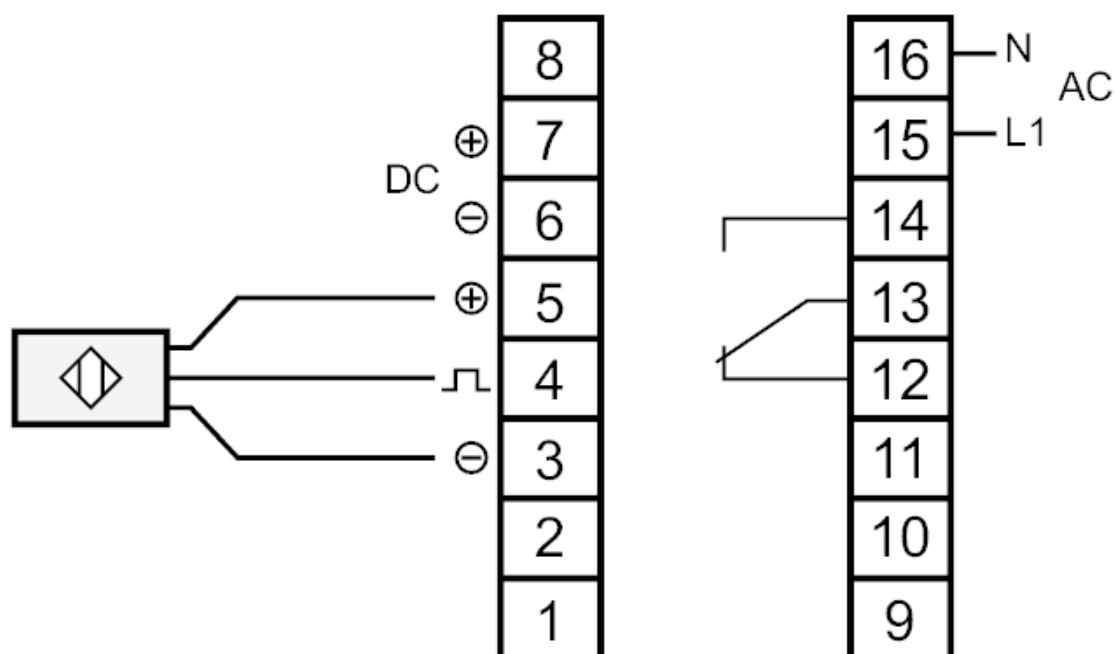

01:	not used
02:	not used
03:	DC Sensor supply (-)
04:	sensor signal pnp
05:	DC Sensor supply (+)
06:	DC supply voltage (-)
07:	DC supply voltage (+)
08:	not used
09:	not used
10:	not used
11:	not used
12:	relay normally closed
13:	relay common
14:	relay normally open
15:	AC supply voltage (L)
16:	AC supply voltage (N)

DD0001

Speed monitor

D100/230VAC



DD0203