


DF2208



Electronic circuit breaker

Fuse/IO-Link/24VDC/8A

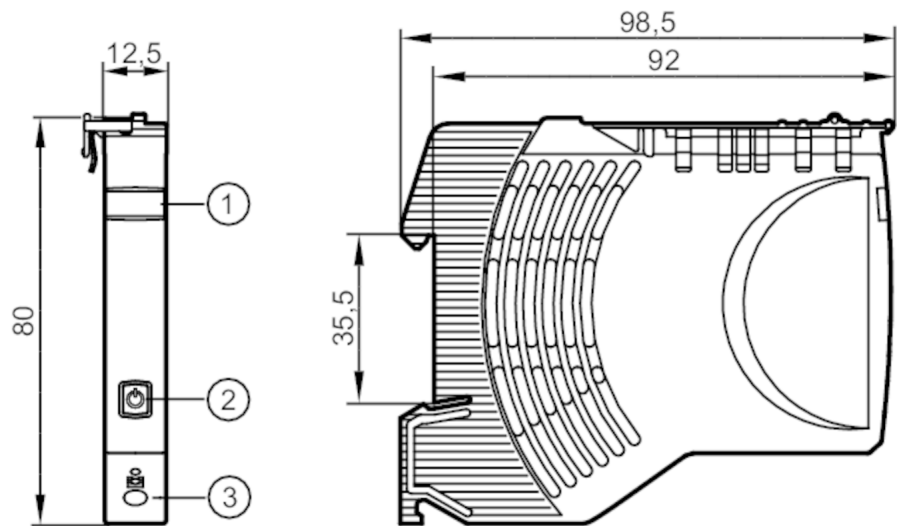

- 1 panel for labelling
- 2 pushbutton on / off / reset status LED 1
- 3 push-in terminal Output 1



Electrical data		
Operating voltage	[V]	to SELV/PELV
Nominal voltage DC	[V]	24
Input voltage DC	[V]	18...30
Protection class		III
Mains buffering time (nominal voltage 24 V DC)	[ms]	10
Closed-circuit current	[mA]	10
Number of channels		1
Nominal current (Fail Safe Element)	[A]	8
Outputs		
Load capacitance, total	[mF]	20
Operating conditions		
Ambient temperature	[°C]	-25...60
Storage temperature	[°C]	-40...70
Protection		IP 20; (on the front)
Degree of soiling		2
Tests / approvals		
EMC	EN 61000-6-3	radiation of interference
	EN 61000-6-2	noise immunity
Mechanical data		
Weight	[g]	70.6
Dimensions	[mm]	80 x 12.5 x 98.5


DF2208



Electronic circuit breaker


Fuse/IO-Link/24VDC/8A

Displays / operating elements		
Display	status	LED
Electrical connection		
push-in terminals:		
contact lever/strip:		
Connection		

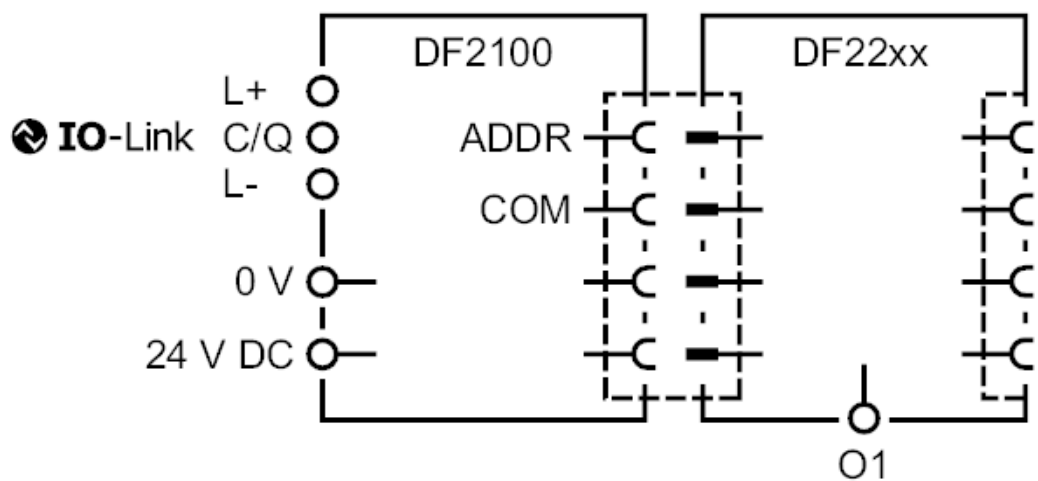

Diagrams and graphs

output characteristics



time-current characteristics