


Compact evaluation unit for speed monitoring

DIA3010-ZPKG



1 potentiometer

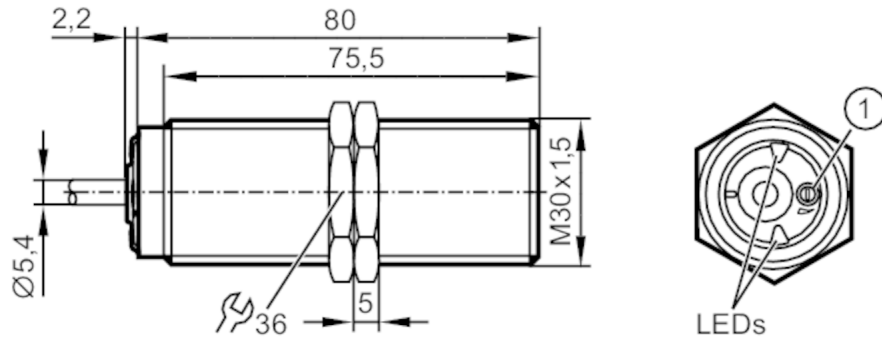

Application

Application simple evaluation of rotating and linear movement with regard to underspeed; blocking

Electrical data

Nominal voltage DC	[V]	10...36
Current consumption	[mA]	< 20
Protection class		III
Reverse polarity protection		yes

Outputs

Total number of outputs		1
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Short-time current rating of switching output	[mA]	250
Electrical design		PNP
Short-circuit proof		yes
Overload protection		yes

Detection zone

Sensing range	[mm]	10
Sensing range adjustable		no
Operating distance	[mm]	0...8.1

Measuring/setting range

Setting range	[Imp/min]	5...3600
---------------	-----------	----------

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of Sr]	10

Response times

Start-up delay	[s]	15
Max. damping frequency	[Imp/min]	18000


DI5020



Compact evaluation unit for speed monitoring

DIA3010-ZPKG

Software / programming		
Adjustment of the switch point	multiturn potentiometer	
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection	IP 65; IP 67	
Tests / approvals		
MTTF	[years]	656
Mechanical data		
Weight	[g]	304.5
Mounting	flush mountable	
Dimensions	[mm]	M30 x 1.5 / L = 80
Thread designation	M30 x 1.5	
Materials	brass special coating; PA; TPE-U	
Displays / operating elements		
Display	switching status	1 x LED, green
Accessories		
Accessories (supplied)	lock nuts: 2	
Electrical connection		
Cable: 2 m, PUR; 3 x 0.5 mm²		
Connection		

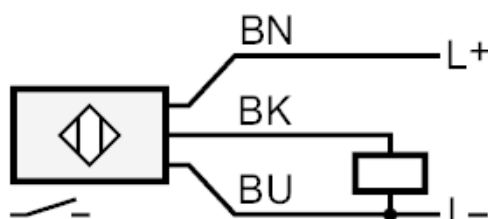

Core colours :

BK =	black
BN =	brown
BU =	blue