



Status Archive

DN0210

No scale drawing available



Application		
Application	Power supply and signal evaluation	
Electrical data		
Nominal voltage AC	[V]	< 110
Nominal voltage tolerance	[%]	10
Nominal voltage tolerance 2	[%]	10
Nominal frequency AC	[Hz]	47...63
Auxiliary energy for sensors DC	[V]	24; (±5 %, ≤ 100 mA)
Inputs / outputs		
Number of inputs and outputs	Number of relay outputs: 1	
Outputs		
Number of relay outputs	1	
Contact rating	8 A / 1250 VA / 250 V AC	
Detection zone		
Sensing range adjustable	no	
Operating conditions		
Ambient temperature	[°C]	0...50
Protection	IP 40	
Protection rating terminals	IP 20	
Tests / approvals		
MTTF	[years]	1369


DN0012



Switching amplifier

N600/110VAC/0,1A

Mechanical data		
Weight	[g]	430.4
Housing	housing for DIN rail mounting	
Materials	plastics	
Displays / operating elements		
Display	switching status	LED, red
	operation	1 x LED, green
Remarks		
Notes	discontinued article	
Electrical connection		
terminals: ...4 mm²		
Connection		

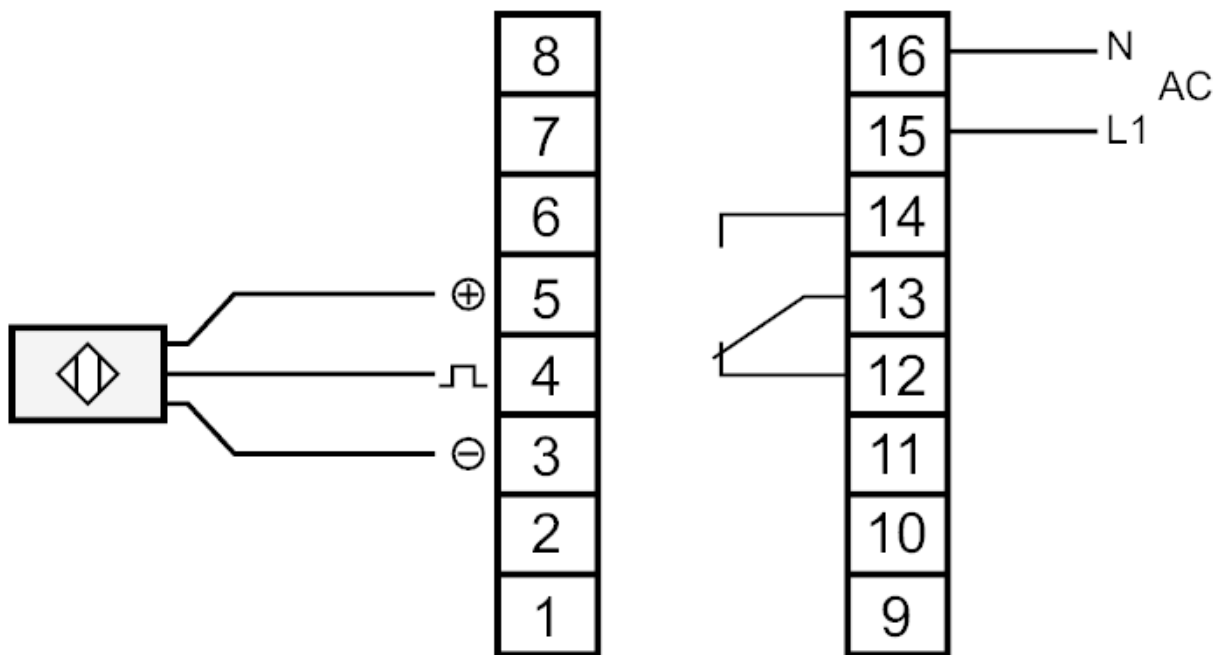

Status Archive

DN0210