




Multifunction timer relay

T700/230VAC

Status Archive

DL0201

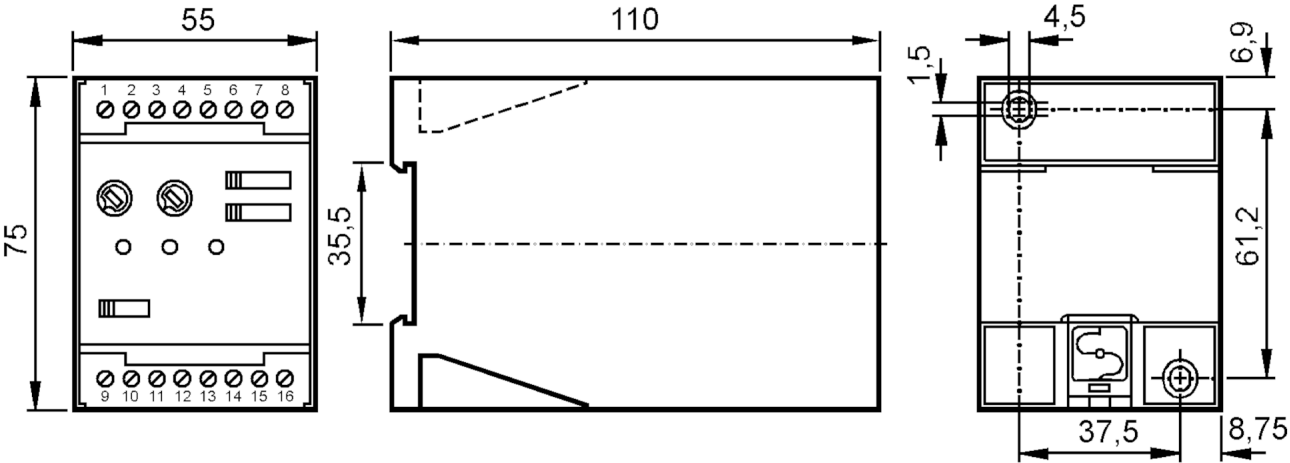


Application		
Application		power supply and switching amplifier with timer function
Electrical data		
Nominal voltage AC	[V]	< 230
Nominal voltage DC	[V]	24
Nominal voltage tolerance	[%]	10
Nominal voltage tolerance 2	[%]	10
Nominal frequency AC	[Hz]	50...60
Auxiliary energy for sensors DC	[V]	24; (±5 %, ≤ 40 mA)
Outputs		
Number of relay outputs		1
Contact rating		8 A / 1250 VA / 250 V AC
Detection zone		
Sensing range adjustable		no
Accuracy / deviations		
Repeatability	[% of Sr]	< 3
Operating conditions		
Ambient temperature	[°C]	0...55
Protection		IP 40
Protection rating terminals		IP 20



Multifunction timer relay

T700/230VAC

Tests / approvals		
MTTF	[years]	471
Mechanical data		
Weight	[g]	444.4
Housing	housing for DIN rail mounting	
Materials	plastics	
Displays / operating elements		
Display	switching status	LED, green
	operation	1 x LED, green
Electrical connection		
terminals: ...4 mm²		
Connection		

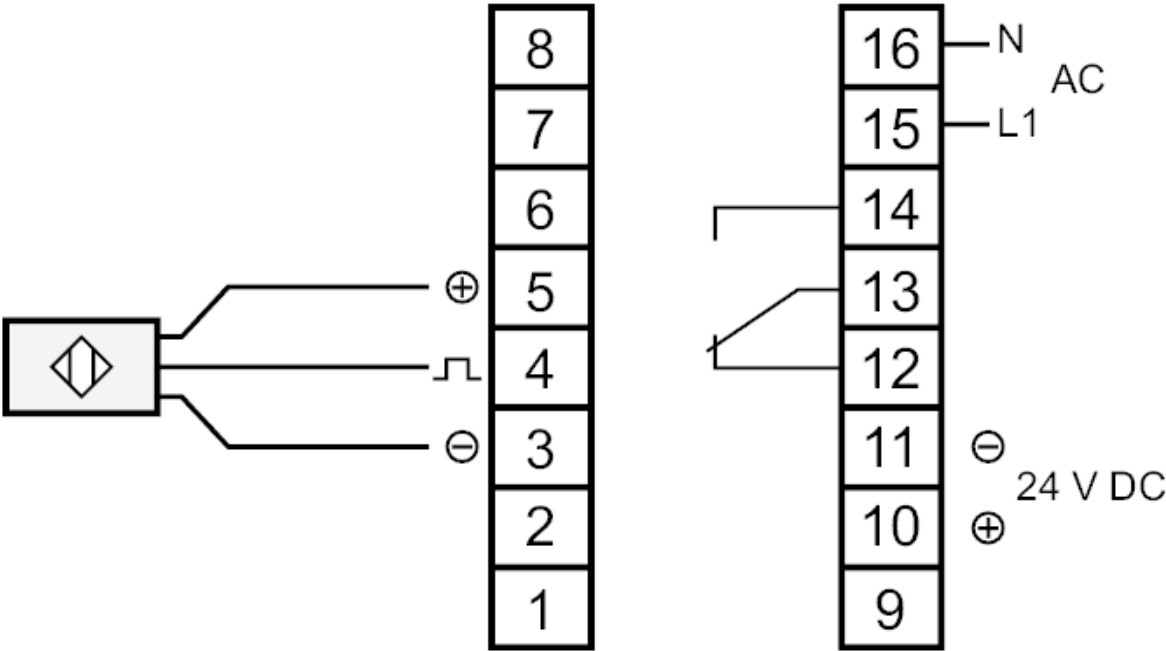

Status Archive

DL0201