


DTA101



RFID read head with AS-Interface

DTSLF AAROASUS01

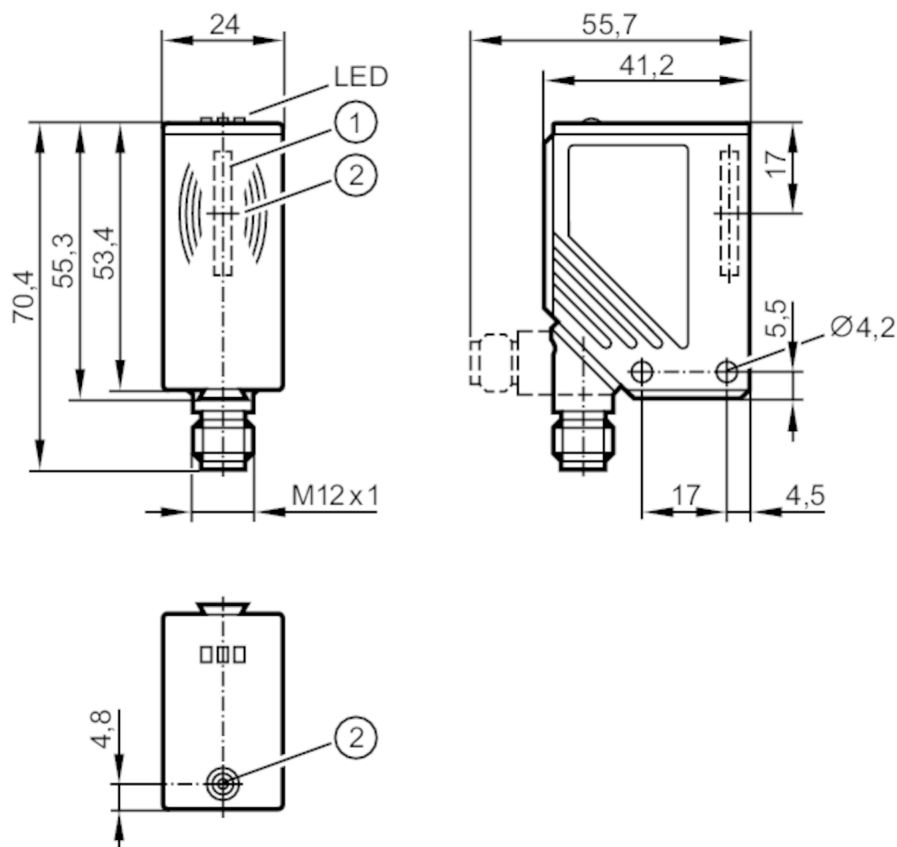

- 1 integrated antenna
2 tag position mark middle of the antenna



Application

Application	detection of objects on transport equipment
-------------	---

Electrical data

Operating voltage	[V]	26.5...31.6 DC; (operating voltage "supply class 2" according to cULus)
Current consumption	[mA]	< 50
Protection class		III
Operating frequency	[MHz]	0,125

Outputs

Electrical design	AS-i
-------------------	------

DTA101



RFID read head with AS-Interface

DTSLF AAROASUS01

Detection zone			
Travel speed	[m/s]	< 0.5	
Distance read/read head front		200	
Distance read/read head side		200	
Note on distance read/read head		referred to	:
		Read/write head	DTA100
		Read head	DTA101
Distance write/read head front	[mm]	400	
Distance write/read head side	[mm]	400	
Note on distance write/read head		referred to	:
		Read/write head	DTA100
		Read head	DTA101
Distance to the ID tag	[mm]	read	≤ 20
			static
Operating conditions			
Ambient temperature	[°C]	-20...50	
Storage temperature	[°C]	-25...80	
Protection		IP 67	
Tests / approvals			
EMC		EN 50295	1999-03
Shock resistance		EN 60068-2-29	40 6 ms
		EN 60068-2-27	50 g 11 ms
Vibration resistance		EN 60068-2-6	20 g 10...2000 Hz
MTTF	[years]	422	
AS-i classification			
AS-i I/O configuration	[hex]	7	
AS-i ID code	[hex]	3	
AS-i certificate		71502	
Mechanical data			
Weight	[g]	145.6	
Housing		rectangular	
Dimensions	[mm]	55 x 24 x 41	
Materials		PA	
Displays / operating elements			
Display		Operating voltage	3 x LED, green
		tag read	1 x LED, yellow
		error AS-i data communication	1 x LED, red
Remarks			
Remarks		For the distances to other ID tags see the respective data sheet (E803xx)	
Pack quantity		1 pcs.	
Electrical connection			
Connector: 1 x M12			

DTA101



RFID read head with AS-Interface

DTSLF AAROASUS01



Connection

