


DV1510



5-segment signal lamp

LED-Tower-5/Std/Bracket+Buz

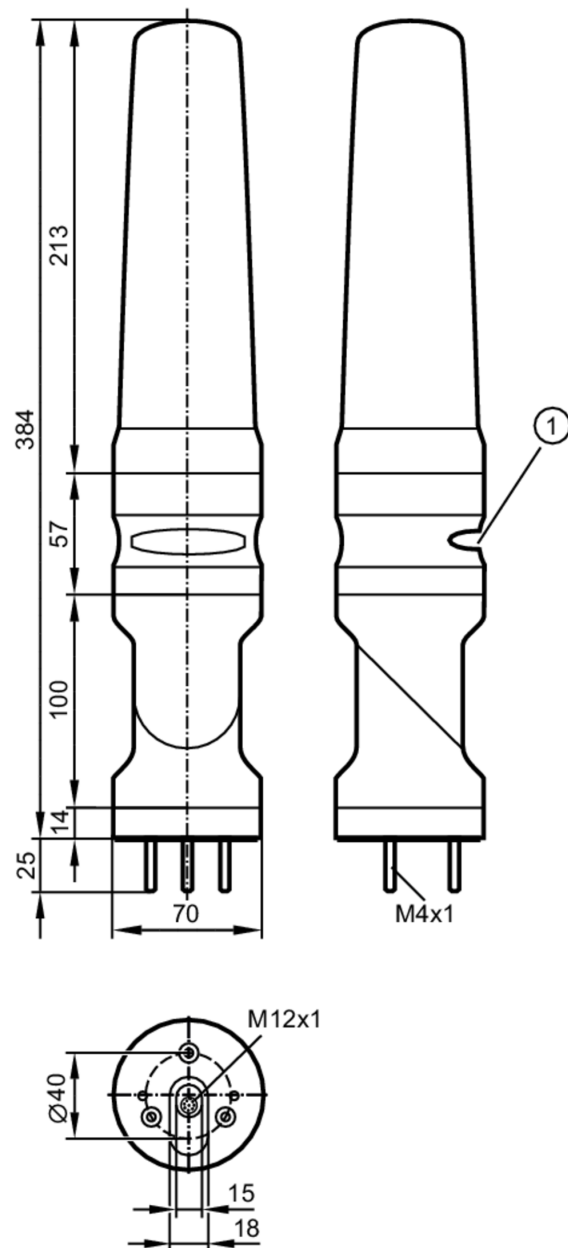

1 buzzer



Application

Application

signalling machine conditions

Electrical data

Operating voltage	[V]	18...30 DC; (to SELV/PELV)
Nominal voltage DC	[V]	24
Current consumption	[mA]	< 200

Inputs / outputs

Number of inputs and outputs

Number of digital inputs: 6



5-segment signal lamp

LED-Tower-5/Std/Bracket+Buz

Inputs		
Number of digital inputs		6
Input current High	[mA]	6
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38.4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
IO-Link device ID		850 d / 00 03 52 h
SIO mode		yes
Required master port type		A
Min. process cycle time	[ms]	3.2
Operating conditions		
Ambient temperature	[°C]	-25...50
Storage temperature	[°C]	-40...75
Max. relative air humidity	[%]	90
Air pressure	[kPa]	< 106
Max. height above sea level	[m]	2000
Protection		IP 54
Mechanical data		
Weight	[g]	646.5
Type of mounting		Mounting base
Dimensions	[mm]	Ø 70 / L = 384
Materials		housing: ABS; lens: PC
Displays / operating elements		
Display	status	1 LED, green
	LED segment	5 x 4 LEDs
Acoustic signal		buzzer
Max. sound pressure	[dB]	85
Accessories		
Accessories (optional)		E11950
		E11807
		E11311
		E12581
Remarks		
Remarks		For further information please see the operating instructions.
Pack quantity		1 pcs.

DV1510




5-segment signal lamp

LED-Tower-5/Std/Bracket+Buz

Electrical connection

1	digital input LED segment 5
2	buzzer
3	digital input LED segment 3
4	digital input LED segment 2
5	voltage supply
6	digital input LED segment 1
7	digital input LED segment 4
8	IO-Link (C/Q)

Connector: M12



Connection