


DV2500



5-segment signal lamp

LED-Tower-5/IOL/Bracket

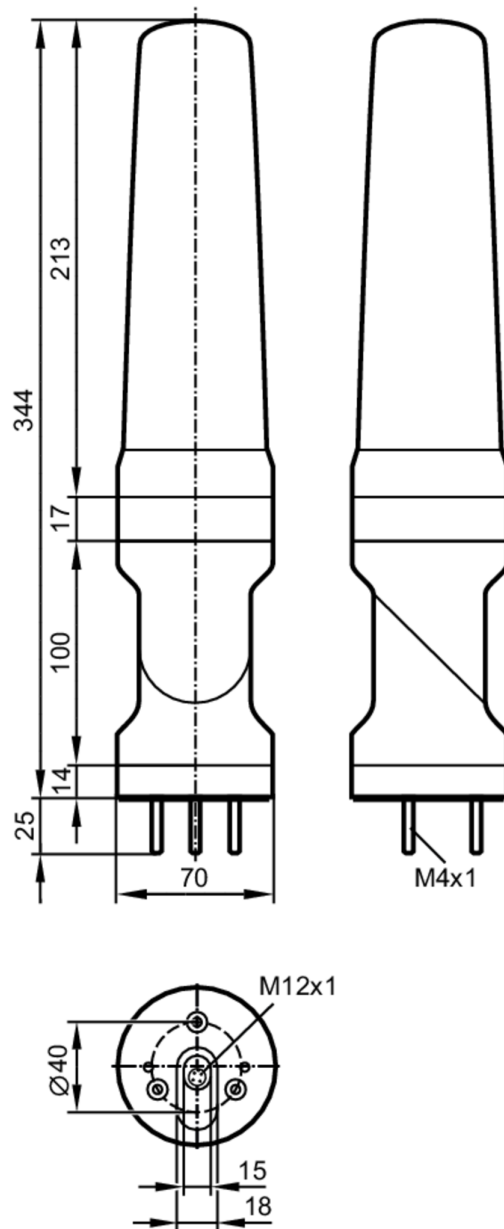

CE cULus IO-Link

Application		
Application		signalling machine conditions
Electrical data		
Operating voltage	[V]	18...30 DC; (to SELV/PELV)
Nominal voltage DC	[V]	24
Current consumption	[mA]	< 200
Inputs		
Input current High	[mA]	6



5-segment signal lamp

LED-Tower-5/IOL/Bracket

Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38.4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
IO-Link device ID		841 d / 00 03 49 h
SIO mode		yes
Required master port type		A
Min. process cycle time [ms]		3.2
Operating conditions		
Ambient temperature [°C]		-25...50
Storage temperature [°C]		-40...75
Max. relative air humidity [%]		90
Air pressure [kPa]		< 106
Max. height above sea level [m]		2000
Protection		IP 65
Mechanical data		
Weight [g]		585
Type of mounting		Mounting base
Dimensions [mm]		Ø 70 / L = 344
Materials		housing: ABS; lens: PC
Displays / operating elements		
Display		LED segment5 x 4 LEDs
Accessories		
Accessories (optional)		E12572
Remarks		
Remarks		For further information please see the operating instructions.
Pack quantity		1 pcs.
Electrical connection		

1	UB+
2	not used
3	UB-
4	IO-Link (C/Q)

Connector: M12



DV2500

5-segment signal lamp

LED-Tower-5/IOL/Bracket



Connection