


DV2510



5-segment signal lamp

LED-Tower-5/IOL/Bracket+Buz

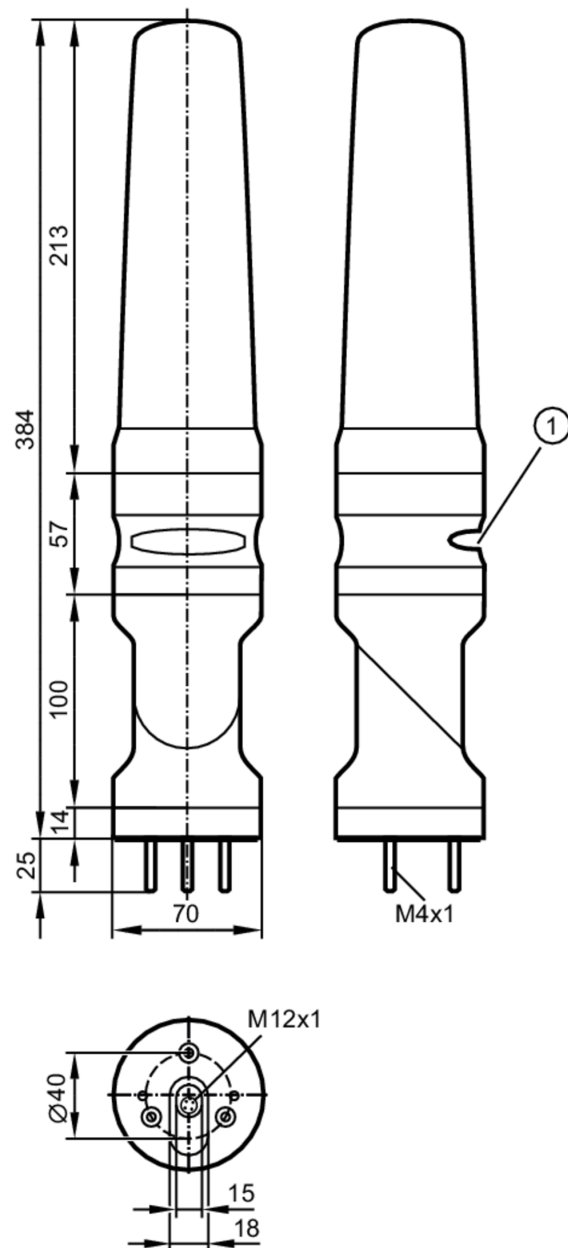

1 buzzer



Application		
Application		signalling machine conditions
Electrical data		
Operating voltage	[V]	18...30 DC; (to SELV/PELV)
Nominal voltage DC	[V]	24
Current consumption	[mA]	< 200
Inputs		
Input current High	[mA]	6

DV2510



5-segment signal lamp

LED-Tower-5/IOL/Bracket+Buz

Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38.4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
IO-Link device ID	841 d / 00 03 49 h	
SIO mode	yes	
Required master port type	A	
Min. process cycle time	[ms]	3.2
Operating conditions		
Ambient temperature	[°C]	-25...50
Storage temperature	[°C]	-40...75
Max. relative air humidity	[%]	90
Air pressure	[kPa]	< 106
Max. height above sea level	[m]	2000
Protection	IP 54	
Mechanical data		
Weight	[g]	644
Type of mounting	Mounting base	
Dimensions	[mm]	Ø 70 / L = 384
Materials	housing: ABS; lens: PC	
Displays / operating elements		
Display	LED segment	5 x 4 LEDs
Acoustic signal	buzzer	
Max. sound pressure	[dB]	85
Accessories		
Accessories (optional)	E12572	
Remarks		
Remarks	For further information please see the operating instructions.	
Pack quantity	1 pcs.	
Electrical connection - plug		
plug		
1	UB+	
2	not used	
3	UB-	
4	IO-Link (C/Q)	
Connector: M12		

DV2510

5-segment signal lamp

LED-Tower-5/IOL/Bracket+Buz

