


DV2520



5-segment signal lamp

LED-Tower-5/IO-Link

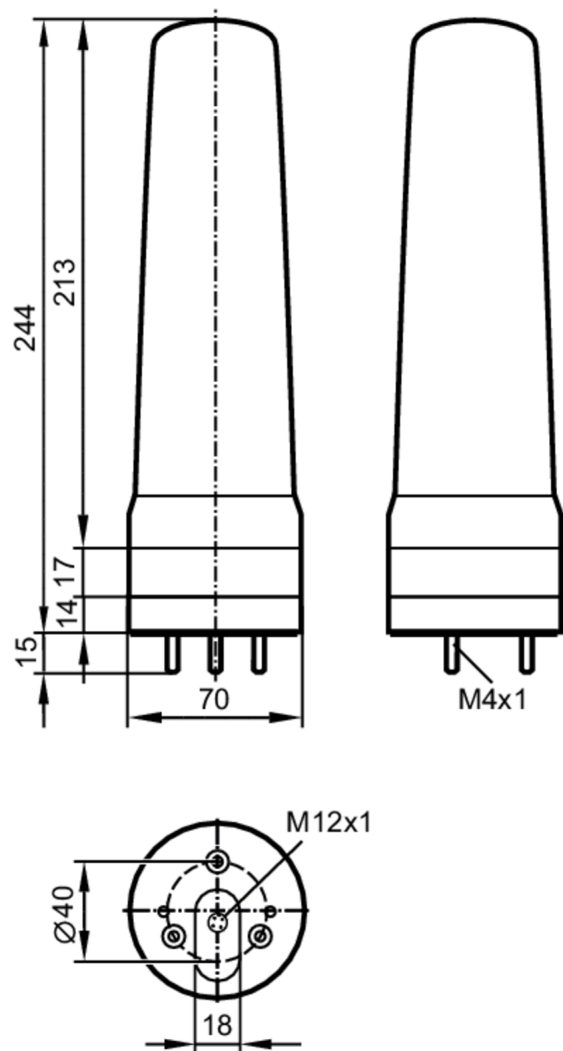

Application		
Application		signalling machine conditions
Electrical data		
Operating voltage	[V]	18...30 DC; (to SELV/PELV)
Nominal voltage DC	[V]	24
Current consumption	[mA]	< 200
Inputs		
Input current High	[mA]	6

DV2520



5-segment signal lamp

LED-Tower-5/IO-Link

Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38.4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
IO-Link device ID	841 d / 00 03 49 h	
SIO mode	yes	
Required master port type	A	
Min. process cycle time	[ms]	3.2
Operating conditions		
Ambient temperature	[°C]	-25...50
Storage temperature	[°C]	-40...75
Max. relative air humidity	[%]	90
Air pressure	[kPa]	< 106
Max. height above sea level	[m]	2000
Protection	IP 65	
Mechanical data		
Weight	[g]	502
Dimensions	[mm]	Ø 70 / L = 244
Materials	housing: ABS; lens: PC	
Displays / operating elements		
Display	LED segment	5 x 4 LEDs
Accessories		
Accessories (optional)	E12572	
Remarks		
Remarks	For further information please see the operating instructions.	
Pack quantity	1 pcs.	
Electrical connection		

- | | |
|---|---------------|
| 1 | UB+ |
| 2 | not used |
| 3 | UB- |
| 4 | IO-Link (C/Q) |

Connector: M12

