


DV2530



5-segment signal lamp

LED-Tower-5/IOL/Buzzer

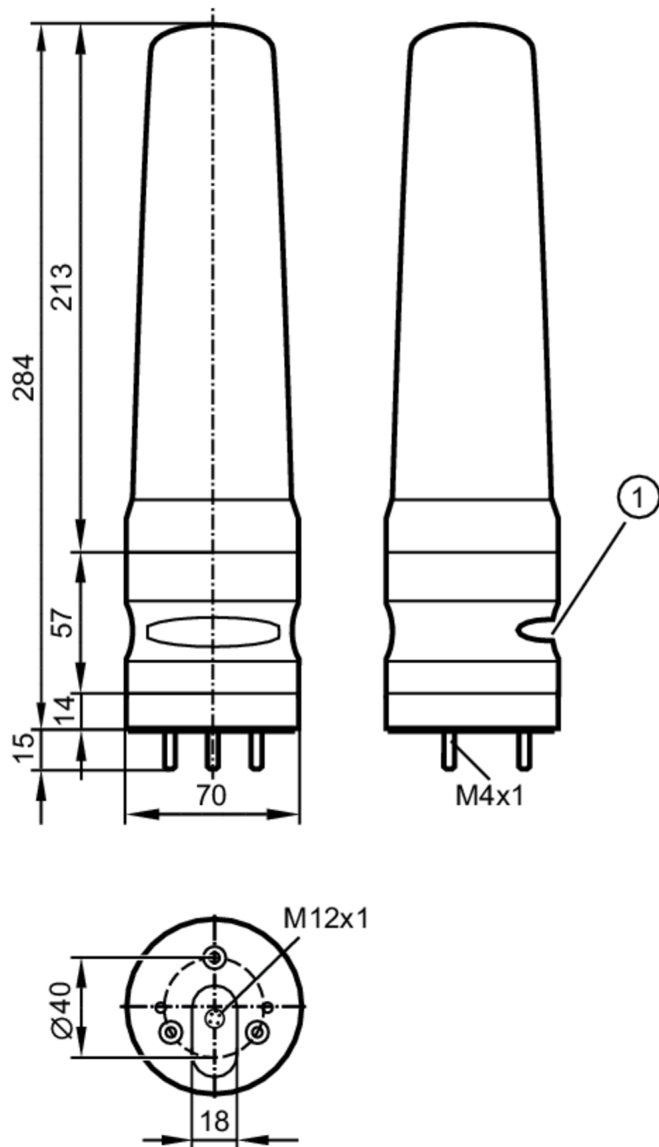

1 buzzer



Application

Application: signalling machine conditions

Electrical data

Operating voltage	[V]	18...30 DC; (to SELV/PELV)
Nominal voltage DC	[V]	24
Current consumption	[mA]	< 200

Inputs

Input current High	[mA]	6
--------------------	------	---

DV2530



5-segment signal lamp

LED-Tower-5/IOL/Buzzer

Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38.4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
IO-Link device ID	841 d / 00 03 49 h	
SIO mode	yes	
Required master port type	A	
Min. process cycle time	[ms]	3.2
Operating conditions		
Ambient temperature	[°C]	-25...50
Storage temperature	[°C]	-40...75
Max. relative air humidity	[%]	90
Air pressure	[kPa]	< 106
Max. height above sea level	[m]	2000
Protection	IP 54	
Mechanical data		
Weight	[g]	565
Dimensions	[mm]	Ø 70 / L = 284
Materials	housing: ABS; lens: PC	
Displays / operating elements		
Display	LED segment	5 x 4 LEDs
Acoustic signal	buzzer	
Max. sound pressure	[dB]	85
Accessories		
Accessories (optional)	E12572	
Remarks		
Remarks	For further information please see the operating instructions.	
Pack quantity	1 pcs.	
Electrical connection		

- | | |
|---|---------------|
| 1 | UB+ |
| 2 | not used |
| 3 | UB- |
| 4 | IO-Link (C/Q) |

Connector: M12

