




Multifunction display for monitoring analogue standard signals

DISPLAY/AX360

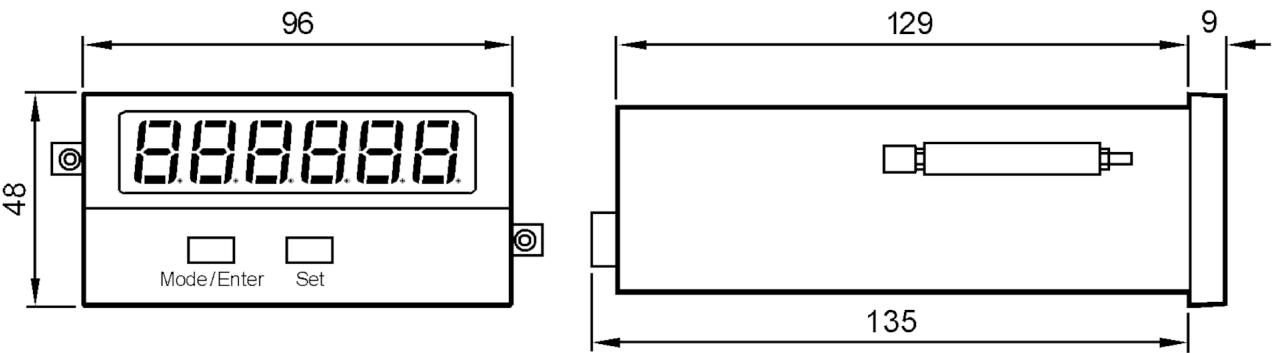

Application		
Application	display of analogue standard signals; e.g. pressure sensors, temperature sensors or flow sensors	
Electrical data		
Frequency AC	[Hz]	50...60
Operating voltage tolerance	[%]	33...58
Operating voltage	[V]	230 / 115 AC / 24 DC
Current consumption	[mA]	110 (18 V); 90 (24 V); 80 (30 V)
Auxiliary energy for sensors DC	[V]	24; (±15 %, 150 mA; Short-circuit proof)
Inputs		
Number of analogue inputs	2	
Outputs		
Analogue current output	[mA]	4...20
Analogue voltage output	[V]	0...10
Detection zone		
Sensing range adjustable	no	
Operating conditions		
Ambient temperature	[°C]	0...45
Storage temperature	[°C]	-25...70
Protection	IP 65; (on the front)	
Protection rating terminals	IP 20	



Multifunction display for monitoring analogue standard signals

DISPLAY/AX360

Tests / approvals		
EMC	EN 50081-1	
	EN 61000-6-2	
MTTF	[years]	38
Mechanical data		
Weight	[g]	551
Materials	Noryl UL94-V-0	
Displays / operating elements		
Display	7-segment LED display, orange 6-digit 15 mm	
Electrical connection		
screw terminals, DC: 10 x ...1.5 mm²		
screw terminals, AC: 4 x ...2.5 mm²		
Connection		

