


DX2052



Multifunction display for monitoring analogue standard signals

DISPLAY/AX460/PNP OUT/DC

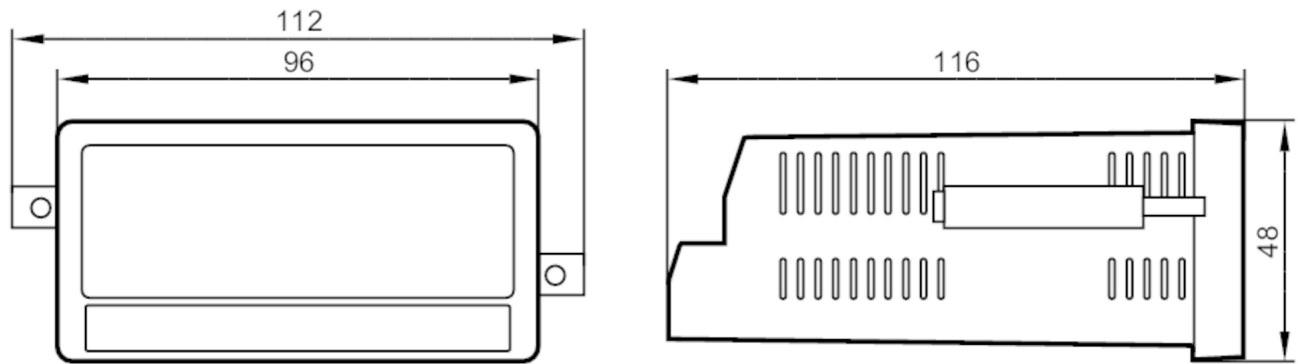

panel
cutout 91 x 43 mm



Application		
Application	displaying and monitoring analogue signals; e.g. pressure sensors, temperature sensors or flow sensors	
Electrical data		
Operating voltage	[V]	18...30 DC
Current consumption	[mA]	100
Inputs		
Number of analogue inputs		2
Outputs		
Number of digital outputs		4
Overload protection		yes
Detection zone		
Sensing range adjustable		no
Operating conditions		
Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-25...70
Protection		IP 65
Protection rating terminals		IP 20
Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-6-3	
	EN 61000-6-4	
Mechanical data		
Weight	[g]	272.6
Type of mounting		panel cutout: 91 x 43 mm
Dimensions	[mm]	48 x 112 x 116
Materials		Noryl UL94-V-0

DX2052



Multifunction display for monitoring analogue standard signals

DISPLAY/AX460/PNP OUT/DC


Displays / operating elements

Display	colour display	full graphic LCD display, touch screen
---------	----------------	--

Electrical connection

screw terminals:

Connection

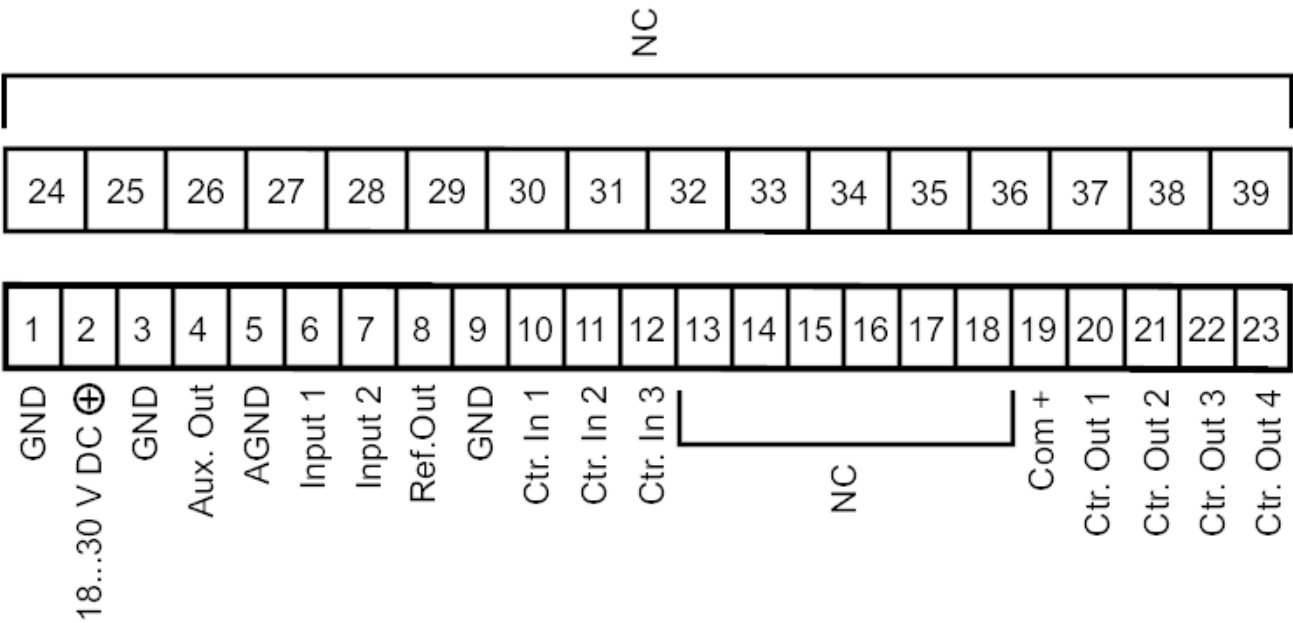

NC not used