


DX2053



Digital display

DISPLAY/AX460/ANALOG/DC

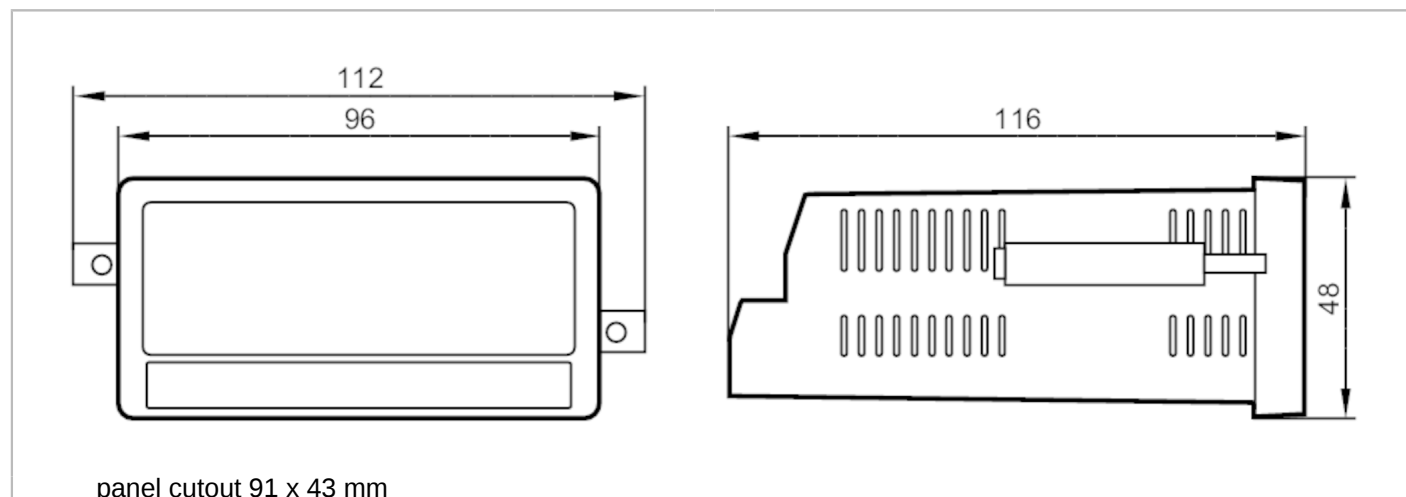

Application		
Application	displaying and monitoring analogue signals; e.g. pressure sensors, temperature sensors or flow sensors	
Electrical data		
Operating voltage	[V]	18...30 DC
Current consumption	[mA]	100
Inputs		
Number of analogue inputs	2	
Outputs		
Number of digital outputs	4	
Max. current load per output	[mA]	200
Number of analogue outputs	1	
Analogue current output	[mA]	4...20
Max. load	[Ω]	270
Analogue voltage output	[V]	10...10
Overload protection	yes	
Operating conditions		
Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-25...70
Protection	IP 65	
Protection rating terminals	IP 20	
Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-6-3	
	EN 61000-6-4	

DX2053



Digital display

DISPLAY/AX460/ANALOG/DC

Mechanical data		
Weight	[g]	296.2
Type of mounting		panel cutout: 91 x 43 mm
Dimensions	[mm]	48 x 112 x 116
Materials		Noryl UL94-V-0
Displays / operating elements		
Display	colour display	full graphic LCD display, touch screen
Electrical connection		
screw terminals:		
Connection		

