




Y-splitter

ZDO2H050MSS0000-00STGH050MSS

Status Archive

EBC114

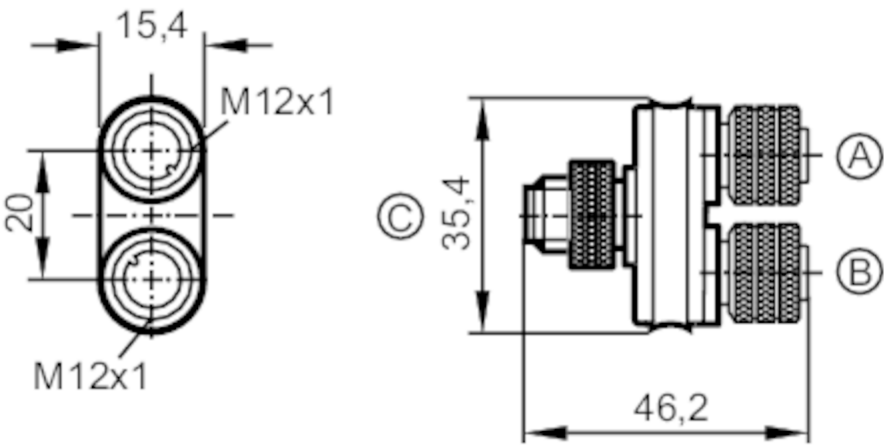

Application		
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 30 AC / < 36 DC
Max. current load per module/slot	[A]	4
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...90
Protection		IP 67
Mechanical data		
Weight	[g]	31.8
Dimensions	[mm]	15.4 x 35.4 x 46.2
Materials		PUR
Material nut		brass / brass
Connector type		M12
Remarks		
Remarks		output A nut PTFE-coated (black) output B nut nickel-plated
Notes		discontinued article
Pack quantity		1 pcs.

Electrical connection - socket


Connector: 2 x M12; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated

E10803




Y-splitter

ZDO2H050MSS0000-00STGH050MSS




Electrical connection - plug

Connector: 1 x M12; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated



Connection

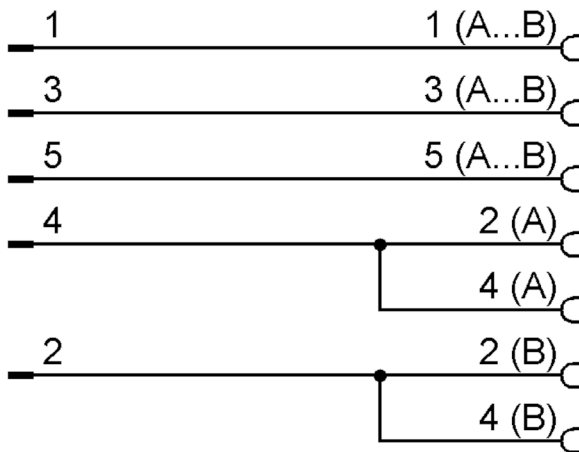

Status Archive

EBC114