


# E10817



## Jumper cable with valve plug

VVDAA041--S00,3A03STAH030VAS

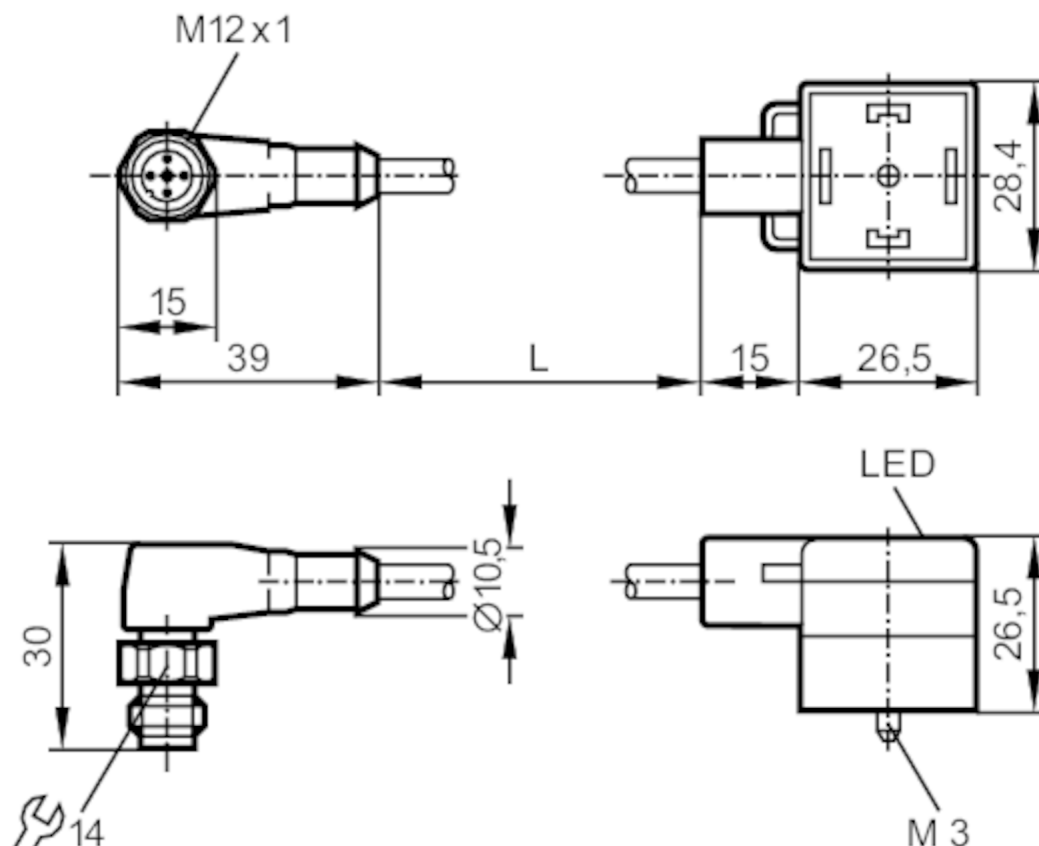

### Electrical data

|                        |     |            |
|------------------------|-----|------------|
| Operating voltage      | [M] | < 24 AC/DC |
| Overvoltage protection |     | yes; (VDR) |

### Operating conditions

|                     |      |          |
|---------------------|------|----------|
| Ambient temperature | [°C] | -25...90 |
| Protection          |      | IP 67    |

### Mechanical data

|              |      |                                                                   |
|--------------|------|-------------------------------------------------------------------|
| Weight       | [g]  | 61                                                                |
| Dimensions   | [mm] | 30 x 15 x 39                                                      |
| Materials    |      | TPU                                                               |
| Material nut |      | stainless steel (1.4404 / 316L) / stainless steel (1.4404 / 316L) |

### Displays / operating elements

|         |           |                 |
|---------|-----------|-----------------|
| Display | operation | 1 x LED, yellow |
|---------|-----------|-----------------|

### Accessories

|                        |                     |
|------------------------|---------------------|
| Accessories (supplied) | screw               |
|                        | panel for labelling |

### Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

# E10817



## Jumper cable with valve plug


VVDAA041--S00,3A03STAH030VAS

### Electrical connection

Cable: 0.3 m, PUR, Halogen-free, black, Ø 4.8 mm; 3 x 0.5 mm<sup>2</sup> (16 x Ø 0.2 mm )


### Electrical connection - socket

Connector: 1 x valve type A DIN, angled; Moulded body: TPU; Locking: stainless steel (1.4404 / 316L)



### Electrical connection - plug

Connector: 1 x M12, angled; Moulded body: TPU; Locking: stainless steel (1.4404 / 316L)



### Connection

