


E10844



Jumper cable with valve plug

VVDAC041MSS00,3A03STAH030VAS

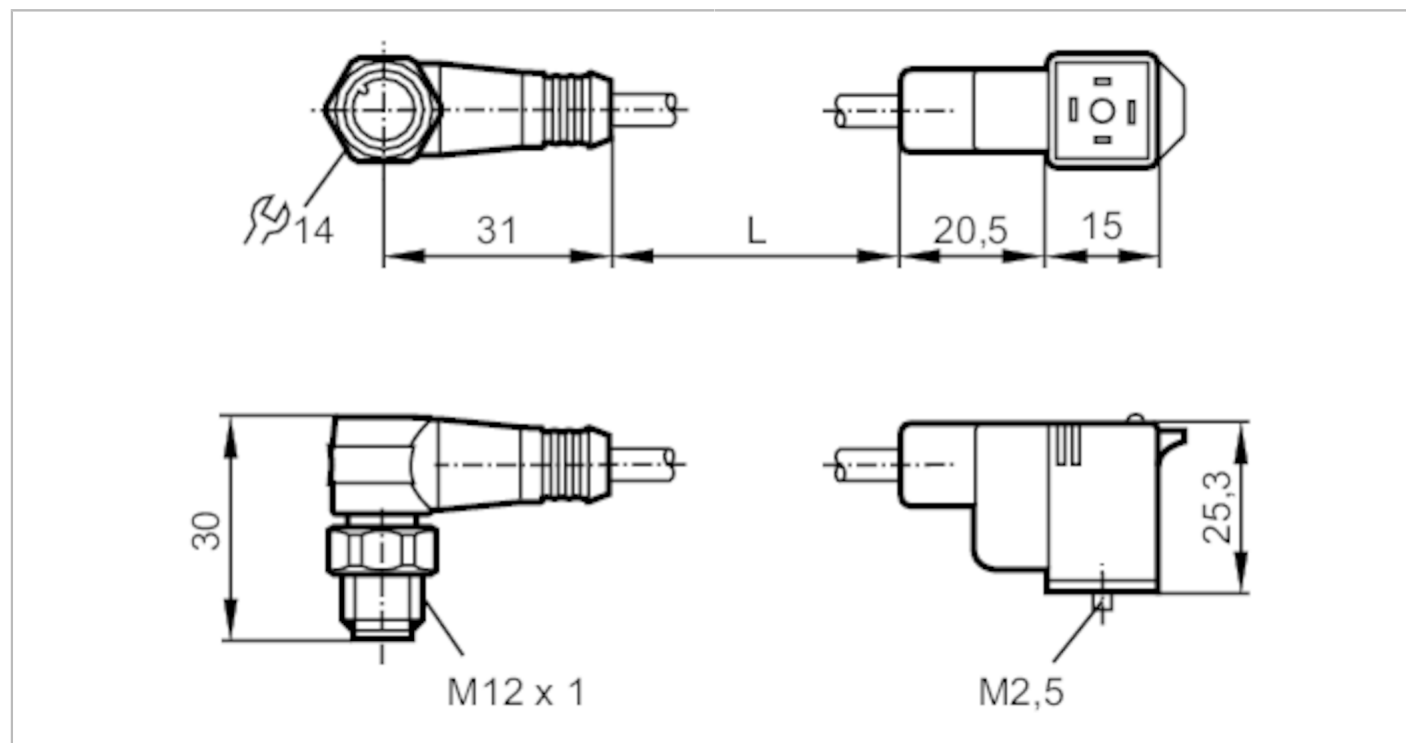

Electrical data

Operating voltage	[M]	< 24 AC/DC
Overvoltage protection		yes; (VDR)

Operating conditions

Ambient temperature	[°C]	-25...90
Protection		IP 67

Mechanical data

Weight	[g]	45.6
Materials		TPU
Material nut		stainless steel (1.4404 / 316L) / stainless steel (1.4404 / 316L)

Displays / operating elements

Display	operation	1 x LED, yellow
---------	-----------	-----------------

Accessories

Accessories (supplied)	screw
	panel for labelling

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 0.3 m, PUR, Halogen-free, black, Ø 4.8 mm; 3 x 0.5 mm² (16 x Ø 0.2 mm)

Electrical connection - socket

Connector: 1 x valve type C DIN, angled; Moulded body: TPU; Locking: stainless steel (1.4404 / 316L); Tightening torque: 0.5 Nm

E10844




Jumper cable with valve plug

VVDAC041MSS00,3A03STAH030VAS



Electrical connection - plug

Connector: 1 x M12, angled; Moulded body: TPU; Locking: stainless steel (1.4404 / 316L); Tightening torque: 0.5 Nm



Connection

