




Connecting cable with socket

ADOGH080MSS0010A06

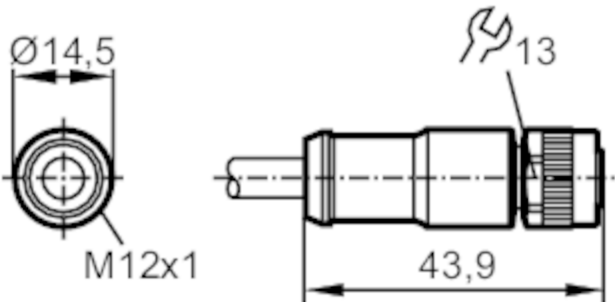

Electrical data

|                         |     |            |
|-------------------------|-----|------------|
| Operating voltage       | [V] | < 60 AC/DC |
| Max. current load total | [A] | 2          |

Operating conditions

|                     |      |          |
|---------------------|------|----------|
| Ambient temperature | [°C] | -25...85 |
| Protection          |      | IP 68    |

Mechanical data

|              |      |                    |
|--------------|------|--------------------|
| Weight       | [g]  | 467.6              |
| Dimensions   | [mm] | 14.5 x 14.5 x 43.9 |
| Materials    |      | TPU                |
| Material nut |      | diecast zinc       |

Remarks


|               |  |        |
|---------------|--|--------|
| Pack quantity |  | 1 pcs. |
|---------------|--|--------|

Electrical connection

Cable: 10 m, PUR, black, Ø 6 mm; 6 x 0.34 mm<sup>2</sup> (42 x Ø 0.1 mm )

Electrical connection - socket

Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated




# E10977



## Connecting cable with socket

ADOGH080MSS0010A06

### Connection

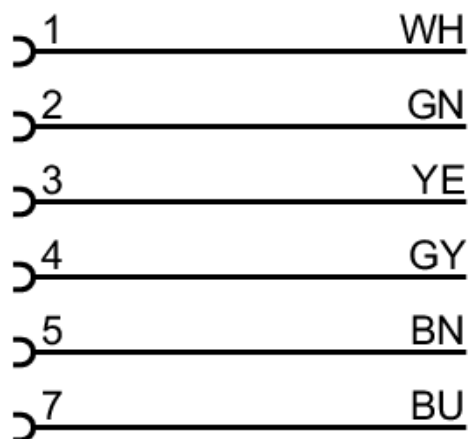

#### Core colours :

|      |        |
|------|--------|
| BN = | brown  |
| BU = | blue   |
| GN = | green  |
| GY = | grey   |
| WH = | white  |
| YE = | yellow |