


Connecting cable with socket

ADOAO140MSS0010H10

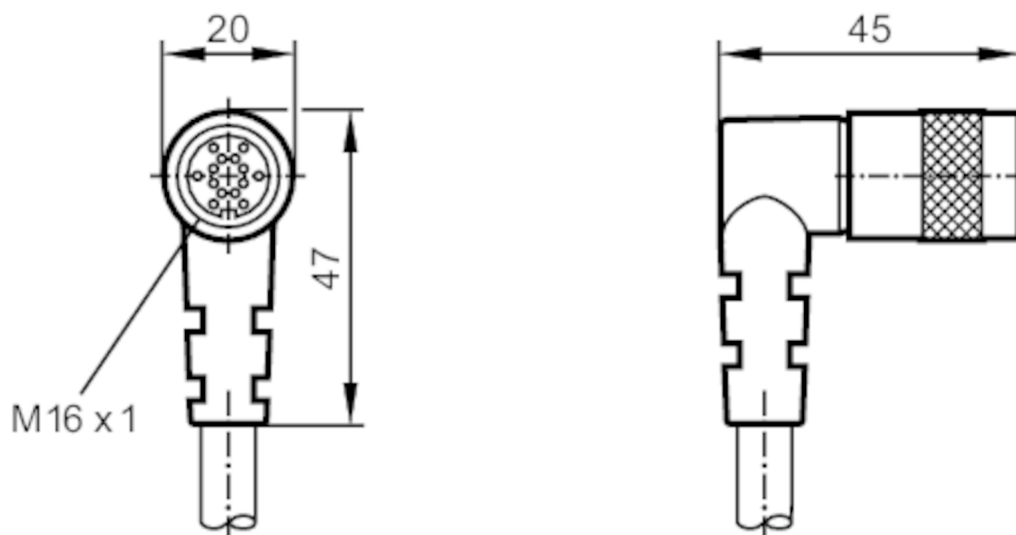

Application

Free from silicone	yes
--------------------	-----

Electrical data

Operating voltage	[V]	< 30 DC
Max. current load total	[A]	3

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Mechanical data

Weight	[g]	1072
Dimensions	[mm]	45 x 20 x 47
Materials		PUR
Material nut		brass
Drag chain suitability	bending radius for flexible use	min. 12.5 x cable diameter
	travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s ²
	torsional strain	± 180 °/m
Drag chain suitability		yes

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 10 m, PUR, Halogen-free, black, Ø 10 mm; 8 x 0.34 mm² + 2 x 0.75 mm²

Electrical connection - socket


Connector: 1 x M16, angled; Moulded body: PUR; Locking: brass, nickel-plated

E11227



Connecting cable with socket

ADOAO140MSS0010H10

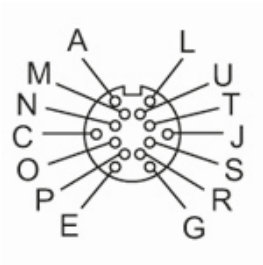

Connection

A	BN
C	WH/GN
E	GY/PK
J	GN
L	BU
N	GN/BN
O	RD/BU
P	WH
S	GY
T	YE

U: not used
R: not used
G: not used
M: not used

Core colours :

BN = brown
BU = blue
GN = green
GY = grey
PK = pink
RD = red
WH = white
YE = yellow