


E11252



Wirable socket

SDOAH040VASFKPG

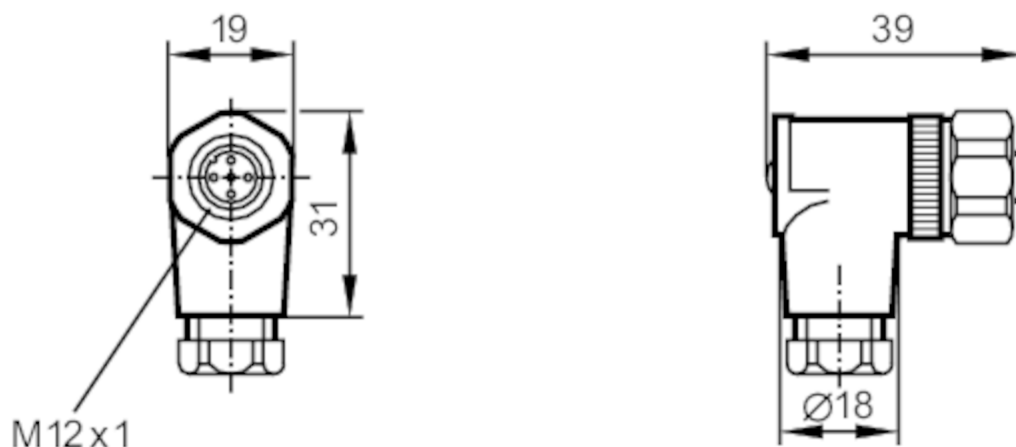

Application

Free from silicone ☐ yes

Electrical data

Operating voltage [V] ☐ < 45 AC / < 70 DC

Max. current load total [A] ☐ 4; (...40 °C)

Operating conditions

Ambient temperature [°C] ☐ -40...85

Protection ☐ IP 68

Mechanical data

Weight [g] ☐ 29

Dimensions [mm] ☐ 39 x 19 x 31

Materials ☐ PBT

Material nut ☐ stainless steel (1.4404 / 316L)

Remarks

Pack quantity ☐ 1 pcs.

Electrical connection

screw terminals: ...0.75 mm²; Cable sheath: Ø 6...8 mm


Electrical connection - socket

Connector: 1 x M12, angled; Moulded body: PBT; Locking: stainless steel (1.4404 / 316L); Contacts: gold-plated

E11252

Wirable socket

SDOAH040VASFKPG



Connection

