


E11431



Jumper cable with valve plug

VVSAB031MSS00,3H03STGH030MSS

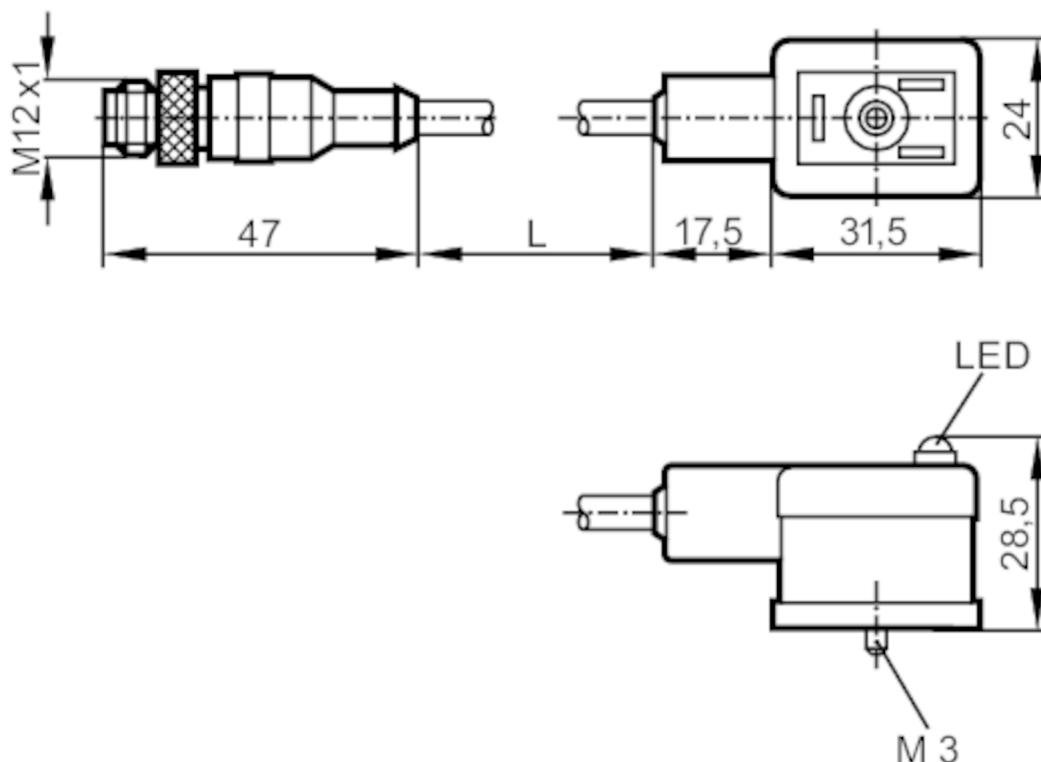

Application

Free from silicone yes

Electrical data

Operating voltage [V] < 24 AC/DC

Overvoltage protection yes; (VDR)

Max. current load total [A] 3

Operating conditions

Ambient temperature [°C] -25...80

Protection IP 67

Mechanical data

Weight [g] 58.6

Materials PUR

Material nut brass / brass

Displays / operating elements

Display switching status 1 x LED, yellow

Accessories

Accessories (supplied) screw
panel for labelling

Remarks

Pack quantity 1 pcs.



Jumper cable with valve plug

VVSAB031MSS00,3H03STGH030MSS

Electrical connection

Cable: 0.3 m, PUR, Halogen-free, black, Ø 5 mm; 3 x 0.5 mm² (42 x Ø 0.1 mm)


Electrical connection - socket

Connector: 1 x valve type B industrial standard, angled; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: nickel-plated brass; Tightening torque: 0.7...0.9 Nm



Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm



Connection

