


# E11435



## Jumper cable with valve plug

VVSAB031MSS0005H03STGH030MSS

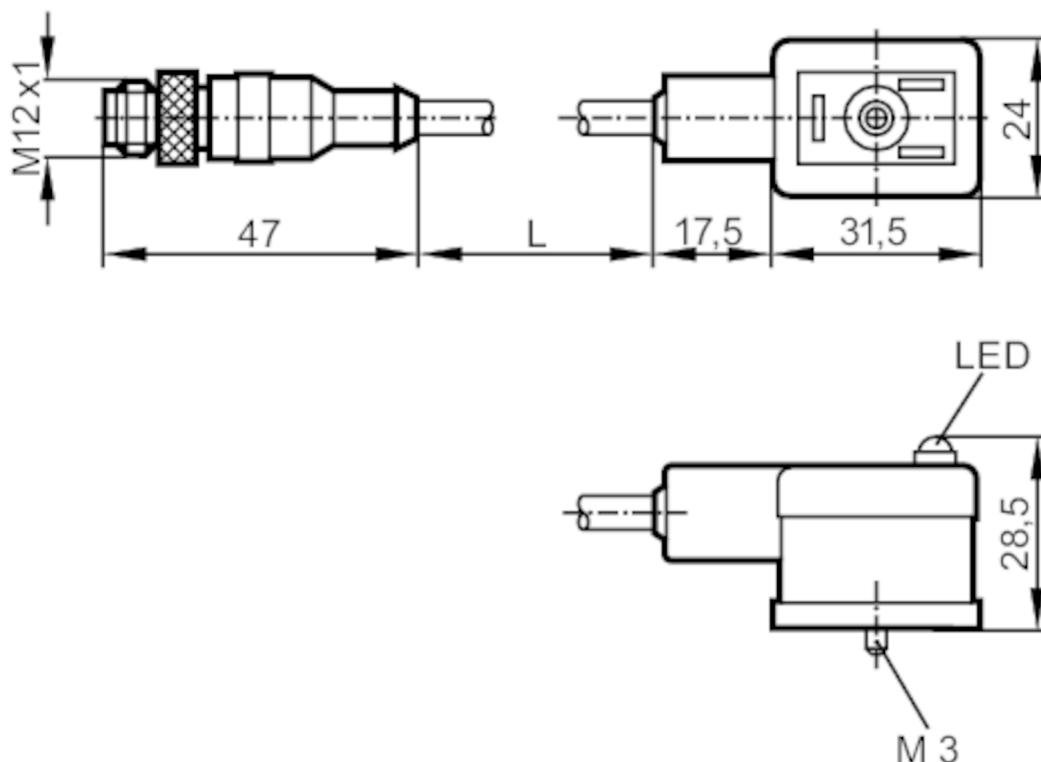

### Application

|                    |     |
|--------------------|-----|
| Free from silicone | yes |
|--------------------|-----|

### Electrical data

|                             |            |
|-----------------------------|------------|
| Operating voltage [V]       | < 24 AC/DC |
| Overvoltage protection      | yes; (VDR) |
| Max. current load total [A] | 3          |

### Operating conditions

|                          |          |
|--------------------------|----------|
| Ambient temperature [°C] | -25...80 |
| Protection               | IP 67    |

### Mechanical data

|              |               |
|--------------|---------------|
| Weight [g]   | 268.6         |
| Materials    | PUR           |
| Material nut | brass / brass |

### Displays / operating elements

|         |                  |                 |
|---------|------------------|-----------------|
| Display | switching status | 1 x LED, yellow |
|---------|------------------|-----------------|

### Accessories

|                        |                     |
|------------------------|---------------------|
| Accessories (supplied) | screw               |
|                        | panel for labelling |

### Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|



## Jumper cable with valve plug

VVSAB031MSS0005H03STGH030MSS

### Electrical connection

Cable: 5 m, PUR, Halogen-free, black, Ø 5 mm; 3 x 0.5 mm<sup>2</sup> (42 x Ø 0.1 mm )


### Electrical connection - socket

Connector: 1 x valve type B industrial standard, angled; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: nickel-plated brass; Tightening torque: 0.7...0.9 Nm



### Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm



### Connection

