


# E11508



## Wirable socket

SDOGH040MSSFKPG

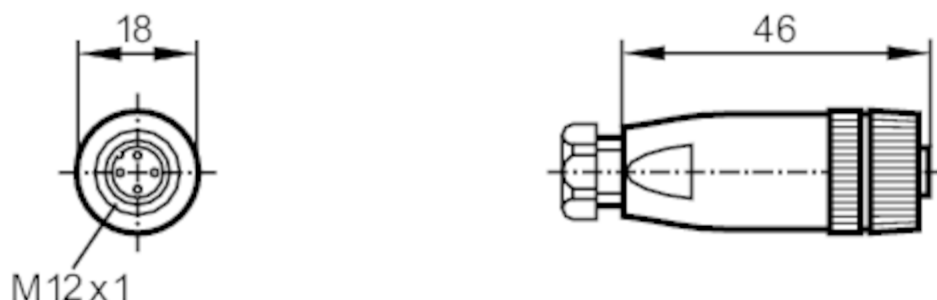

### Application

|                    |     |
|--------------------|-----|
| Free from silicone | yes |
|--------------------|-----|

### Electrical data

|                         |     |                   |
|-------------------------|-----|-------------------|
| Operating voltage       | [V] | < 45 AC / < 70 DC |
| Max. current load total | [A] | 4; (...40 °C)     |

### Operating conditions

|                     |      |          |
|---------------------|------|----------|
| Ambient temperature | [°C] | -25...85 |
| Protection          |      | IP 68    |

### Mechanical data

|              |      |              |
|--------------|------|--------------|
| Weight       | [g]  | 28.6         |
| Dimensions   | [mm] | 18 x 18 x 46 |
| Materials    |      | PA           |
| Material nut |      | brass        |

### Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

### Electrical connection

screw terminals: ...0.75 mm<sup>2</sup>; Cable sheath: Ø 4...6 mm


### Electrical connection - socket

Connector: 1 x M12, straight; Moulded body: PA; Locking: brass, nickel-plated; Contacts: gold-plated

# E11508

## Wirable socket

SDOGH040MSSFKPG



### Connection

