


E11509



Wirable socket

SDOAH040MSSFKPG

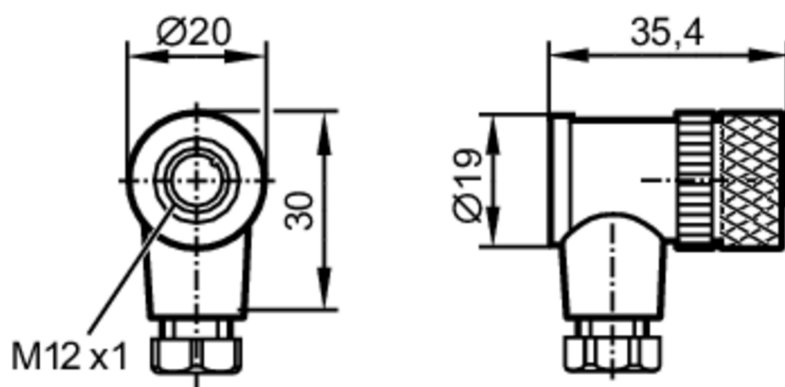

Application

Free from silicone	yes
--------------------	-----

Electrical data

Operating voltage	[V]	< 45 AC / < 70 DC
Max. current load total	[A]	4; (...40 °C)

Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 68

Mechanical data

Weight	[g]	28
Materials		PA
Material nut		brass

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

screw terminals: ...0.75 mm²; Cable sheath: Ø 4...6 mm


Electrical connection - socket

Connector: 1 x M12, angled; Moulded body: PA; Locking: brass, nickel-plated; Contacts: gold-plated

E11509

Wirable socket

SDOAH040MSSFKPG



Connection

