


E11597



Connecting cable with socket

ADOGH050MSA0005C02

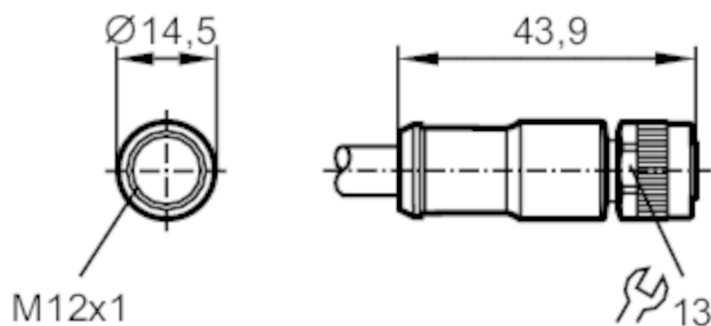

Application		
Application		CAN bus
Electrical data		
Operating voltage	[V]	< 30 AC / < 36 DC
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...85
Protection		IP 68
Mechanical data		
Weight	[g]	388.4
Dimensions	[mm]	14.5 x 14.5 x 43.9
Materials		PUR
Material nut		brass
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 5 m, PUR, Halogen-free, lilac, Ø 6.8 mm, shielded; 2 x 0.25 mm ² (19 x Ø 0.13 mm) + 2 x 0.34 mm ² (19 x Ø 0.16 mm) + 1 x 0.34 mm ² (19 x Ø 0.16 mm)		
Electrical connection - socket		
Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated		

E11597




Connecting cable with socket

ADOGH050MSA0005C02



Connection

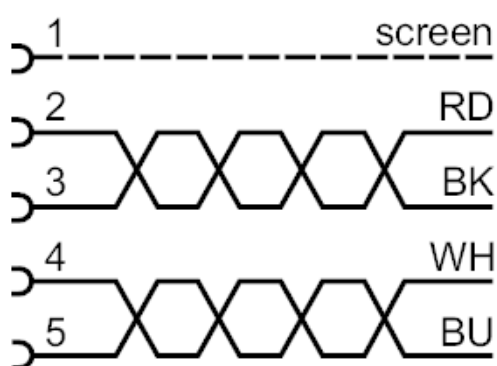

Core colours :

BK =	black
BU =	blue
RD =	red
WH =	white
screen =	screen