


Connecting cable with plug

ASTGH050MSA0002C02

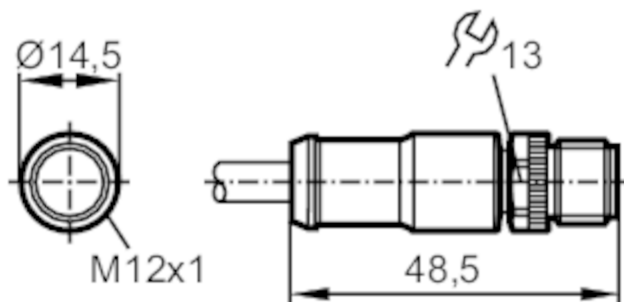

Application

Application

CAN bus

Electrical data

Operating voltage

[V]

< 30 AC / < 36 DC

Max. current load total

[A]

4

Operating conditions

Ambient temperature

[°C]

-25...85

Protection

IP 68

Mechanical data

Weight

[g]

168.6

Dimensions

[mm]

14.5 x 14.5 x 48.5

Materials

PUR

Material nut

brass

Remarks

Pack quantity

1 pcs.

Electrical connection

Cable: 2 m, PUR, Halogen-free, lilac, Ø 6.8 mm, shielded; RD / BK: 2 x 0.25 mm² (19 x Ø 0.13 mm) + WH / BU: 2 x 0.34 mm² (19 x Ø 0.16 mm) + screen: 1 x 0.34 mm² (19 x Ø 0.16 mm)

Electrical connection - plug


Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.5 Nm

E11598




Connecting cable with plug

ASTGH050MSA0002C02



Connection

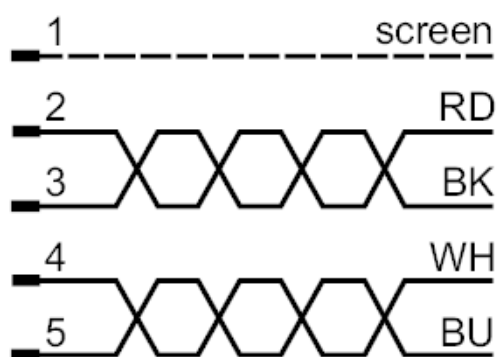

Core colours :

BK =	black
BU =	blue
RD =	red
WH =	white
screen =	screen