


E11599



Connecting cable with plug

ASTGH050MSA0005C02

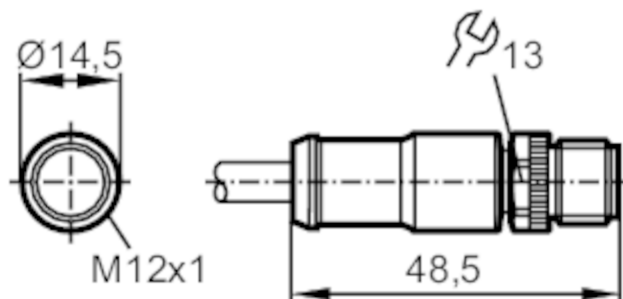

Application

Application	CAN bus
-------------	---------

Electrical data

Operating voltage	[V]	< 30 AC / < 36 DC
Max. current load total	[A]	4

Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 68

Mechanical data

Weight	[g]	382.2
Dimensions	[mm]	14.5 x 14.5 x 48.5
Materials		PUR
Material nut		brass

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 5 m, PUR, Halogen-free, lilac, Ø 6.8 mm, shielded; 2 x 0.25 mm² (19 x Ø 0.13 mm) + 2 x 0.34 mm² (19 x Ø 0.16 mm) + 1 x 0.34 mm² (19 x Ø 0.16 mm)

Electrical connection - plug


Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.5 Nm

E11599




Connecting cable with plug

ASTGH050MSA0005C02



Connection

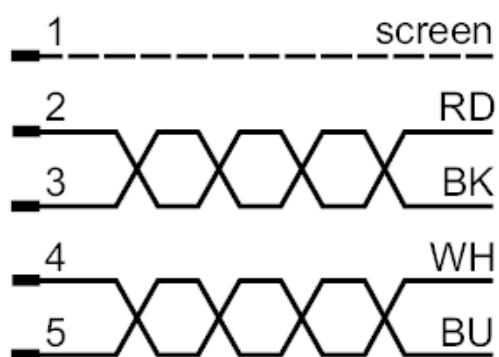

Core colours :

BK =	black
BU =	blue
RD =	red
WH =	white
screen =	screen