


E11661



Connecting cable with socket

ADOGA030MSS0010E03

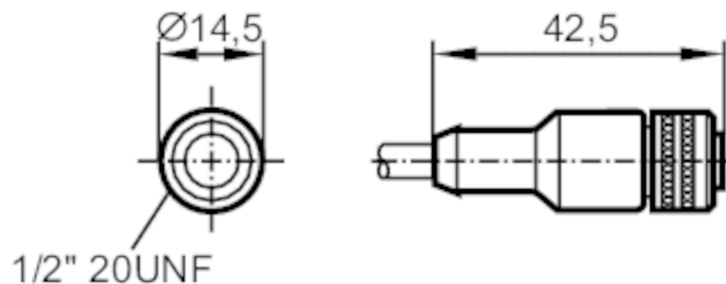

Electrical data

Operating voltage [V] < 250 AC / < 300 DC

Operating conditions

Ambient temperature [°C] -25...90

Protection IP 67

Mechanical data

Weight [g] 376.8

Dimensions [mm] 14.5 x 14.5 x 42.5

Materials TPU

Material nut brass

Drag chain suitability	bending radius for flexible use	min. 10 x cable diameter
	travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s ²
	bending cycles	> 2 Mio.
	torsional strain	± 180 °/m

Drag chain suitability yes

Remarks

Pack quantity 1 pcs.

Electrical connection

Cable: 10 m, PVC, yellow, Ø 5.2 mm; 3 x (42 x Ø 0.1 mm) / AWG 22

Electrical connection - socket

Connector: 1 x 1/2", straight; Moulded body: TPU; Locking: brass, nickel-plated

E11661




Connecting cable with socket

ADOGA030MSS0010E03



Connection

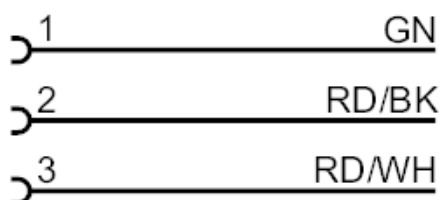

	Core colours :
GN =	green
RD/BK =	red/black
RD/WH =	red/white