

E11761




Y connection cable

YDOAH040MSS0002H04STGH050MSS

Status Archive

/EVC434

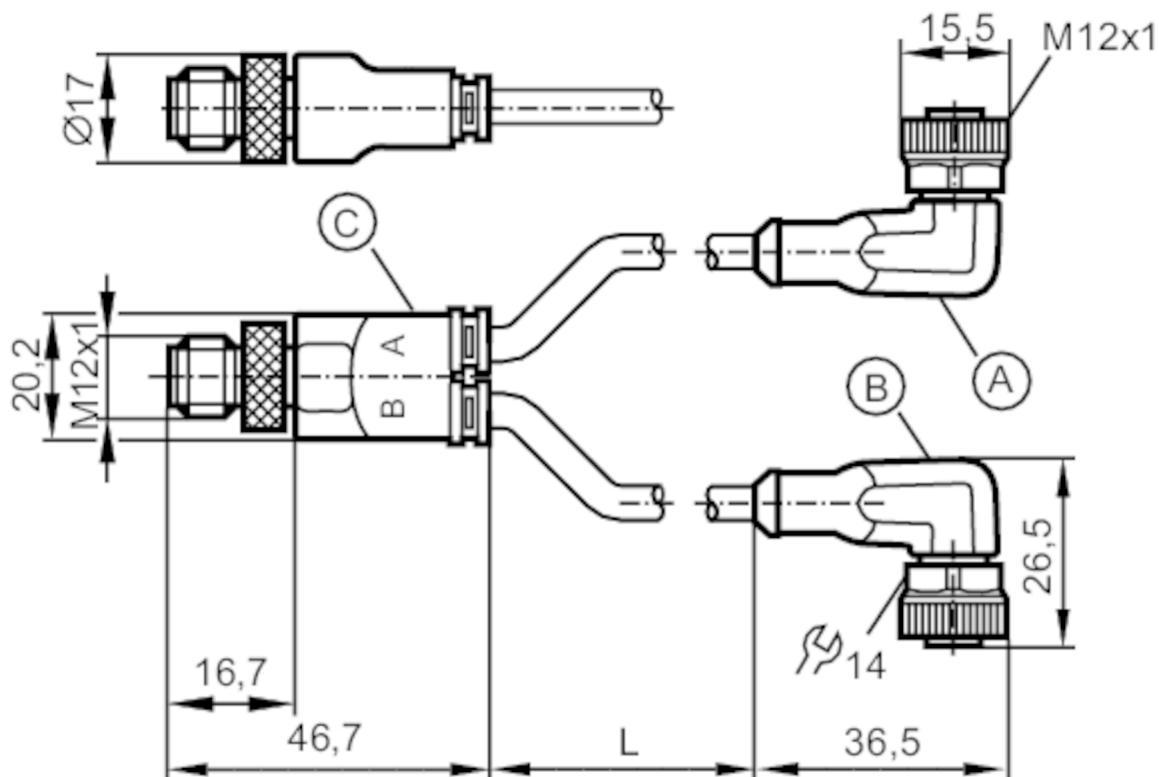

Application

Free from silicone yes

Electrical data

Operating voltage [V] < 250 AC / < 300 DC

Operating conditions

Ambient temperature [°C] -25...90

Protection IP 68

Mechanical data

Weight [g] 195.8

Materials connector housing: TPU black; socket housing: TPU orange; Sealing: FKM

Material nut brass / brass

Number of ports splitter box 2

Remarks

Pack quantity 1 pcs.

Electrical connection

Cable: 2 m, PUR, Halogen-free, black, Ø 4.9 mm; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Electrical connection - socket


Connector: 2 x M12; Locking: brass, nickel-plated; Contacts: gold-plated

E11761




Y connection cable

YDOAH040MSS0002H04STGH050MSS




Electrical connection - plug

Connector: 2 x M12; Locking: brass, nickel-plated; Contacts: gold-plated



Connection

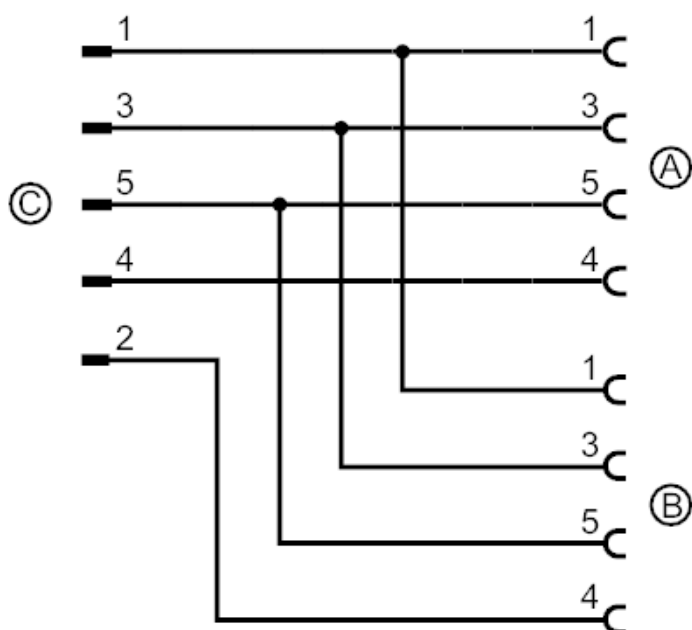

Status Archive

/EVC434