


E11795



Wirable socket

SDOAA030MSSFKPG

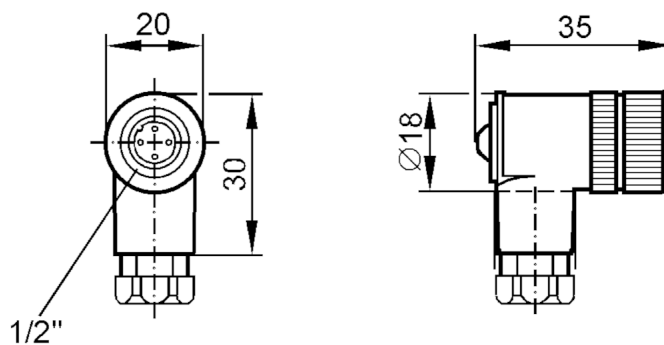

Application

Free from silicone	yes
--------------------	-----

Electrical data

Operating voltage	[V]	< 250 AC
Max. current load total	[A]	4; (...40 °C)

Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 67

Mechanical data

Weight	[g]	25.4
Dimensions	[mm]	35 x 20 x 30
Materials		PA
Material nut		brass

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

terminals: ...0.75 mm²; Cable sheath: Ø 4...6 mm


Electrical connection - socket

Connector: 1 x 1/2" angled; Moulded body: PA; Locking: brass, nickel-plated; Contacts: gold-plated

E11795

Wirable socket

SDOAA030MSSFKPG



Connection

