


E11847



Splitter box

ProcessLine SB V4A 25m

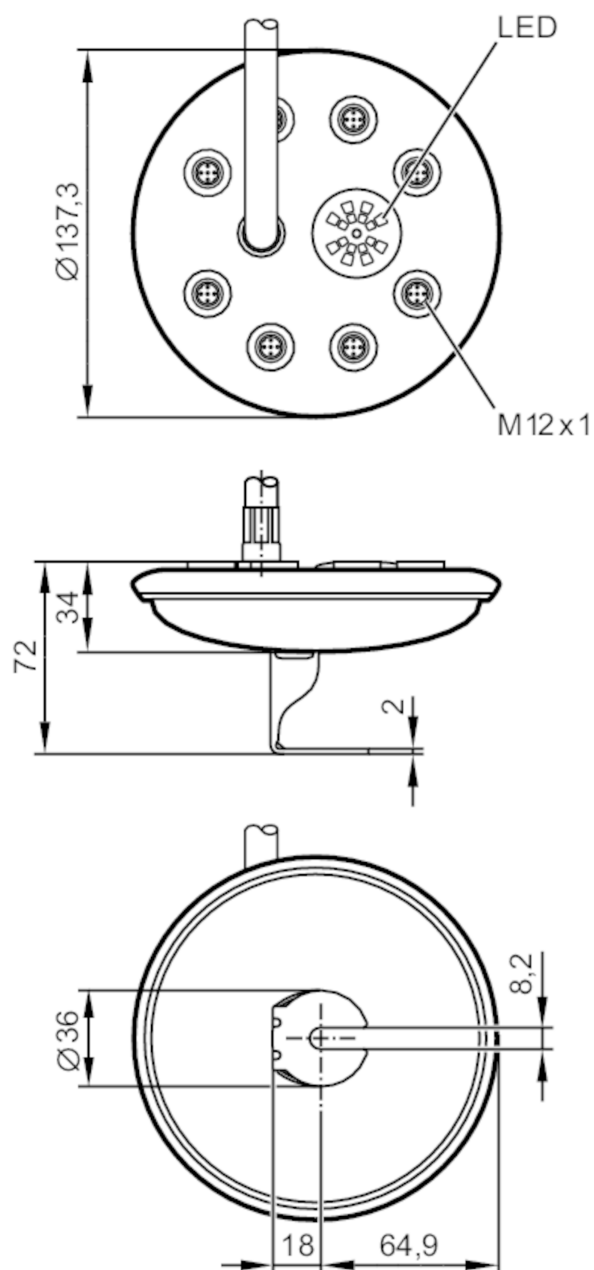

Electrical data

Operating voltage	[V]	10...36 DC
Protection class		III
Max. current load per module/slot	[A]	4
Max. current load total	[A]	6

Outputs

Electrical design	PNP
-------------------	-----

Operating conditions

Ambient temperature	[°C]	-5...70
Protection	IP 69K; (To ensure the protection rating unused sockets must be covered with the supplied protective caps.; Tightening torque 0,8 Nm)	

E11847



Splitter box

ProcessLine SB V4A 25m

Tests / approvals		
MTTF	[years]	2487
Mechanical data		
Weight	[g]	5284.6
Materials		stainless steel
Number of ports splitter box		8
Connector type		M12
Displays / operating elements		
Display	switching status	16 x LED, yellow
	operation	1 x LED, green
Accessories		
Accessories (supplied)		Protective caps, for M12 sockets
Remarks		
Remarks		external voltage supply according to PELV
Pack quantity		1 pcs.
Electrical connection		
Cable: 25 m, PUR / PVC, black, Ø 11 mm; 3 x 0.75 mm ² + 16 x 0.34 mm ²		
Electrical connection - slot		
Connector: 8 x M12; Moulded body: stainless steel		


E11847



Splitter box

ProcessLine SB V4A 25m

Connection

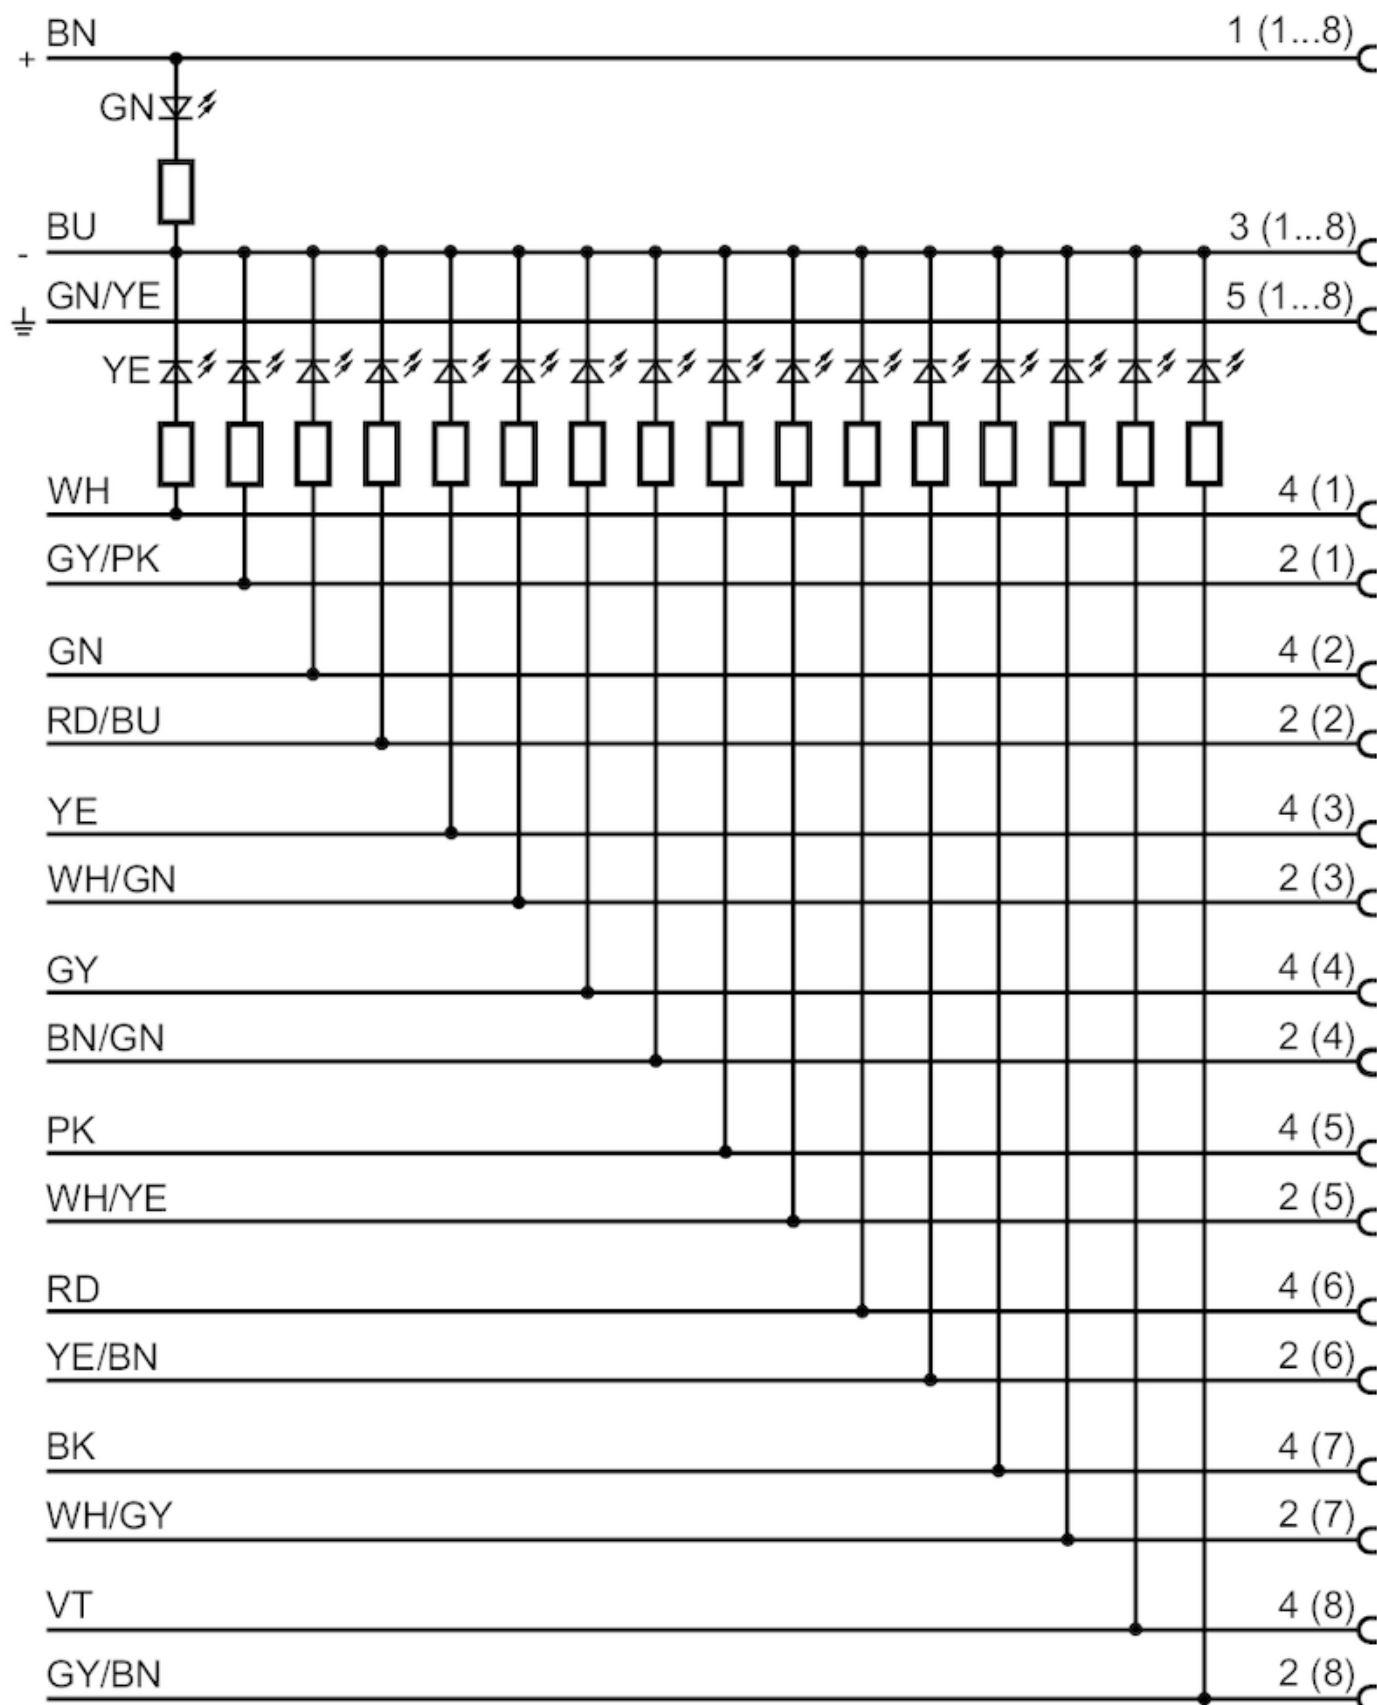

Core colours :

BK = black ifm electronic gmbh • Friedrichstraße 1 • 45128 Essen — We reserve the right to make technical alterations without prior notice. — EN-GB — E11847-00 — 08.02.2007

BN = brown

BU = blue

E11847

Splitter box

ProcessLine SB V4A 25m

