




Connecting cable with socket

ADOGH080MSS0015K08

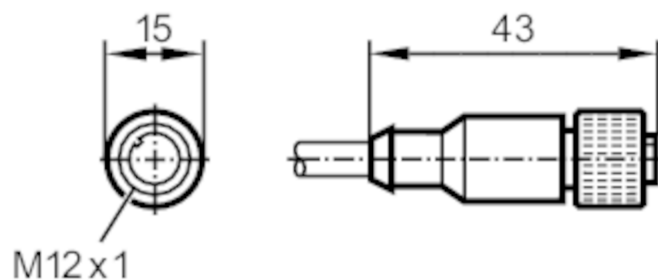

Electrical data

Operating voltage	[V]	< 30 AC / < 36 DC
Protection class		III

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Mechanical data

Weight	[g]	973.7
Dimensions	[mm]	15 x 15 x 43
Materials		PUR
Material nut		brass

Remarks

Notes	For 8-pole sockets the core colours are not standardised.; Please note the wiring of the sensor and the sockets (see data sheet).
Pack quantity	1 pcs.

Electrical connection

Cable: 15 m, PUR, black, Ø 6.6 mm, shielded; 8 x 0.25 mm² (14 x Ø 0.15 mm)

Electrical connection - socket


Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Tightening torque: 0.7...0.9 Nm; Shielded connection cable: screen connected

E11856



Connecting cable with socket

ADOGH080MSS0015K08



Connection



colours to DIN 47100

Core colours :

BN =	brown
BU =	blue
GN =	green
GY =	grey
PK =	pink
RD =	red
WH =	white
YE =	yellow
screen =	screen