


Connection cable

VDOAH040MSS0025H04STGH040MSS

Status Archive

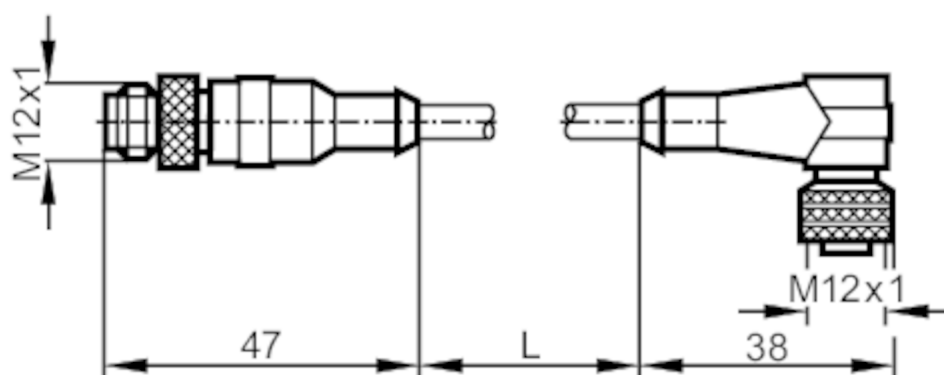

Application

Free from silicone	yes
--------------------	-----

Electrical data

Operating voltage	[V]	< 250 AC / < 300 DC
Max. current load total	[A]	3

Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 68

Mechanical data

Weight	[g]	795.2
Materials		PUR
Material nut		brass / brass

Remarks

Notes	discontinued article
Pack quantity	1 pcs.

Electrical connection

Cable: 25 m, PUR, Halogen-free, black, Ø 4.7 mm; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Electrical connection - socket


Connector: 1 x M12, angled; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm

E11920



Connection cable

VDOAH040MSS0025H04STGH040MSS




Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm



Connection

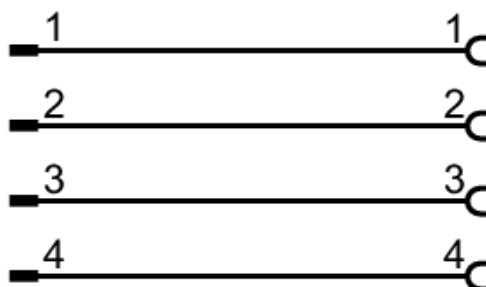

Status Archive