


E12062



Connection cable

STGH050MSS0004B03VDAA041--S

Status Archive

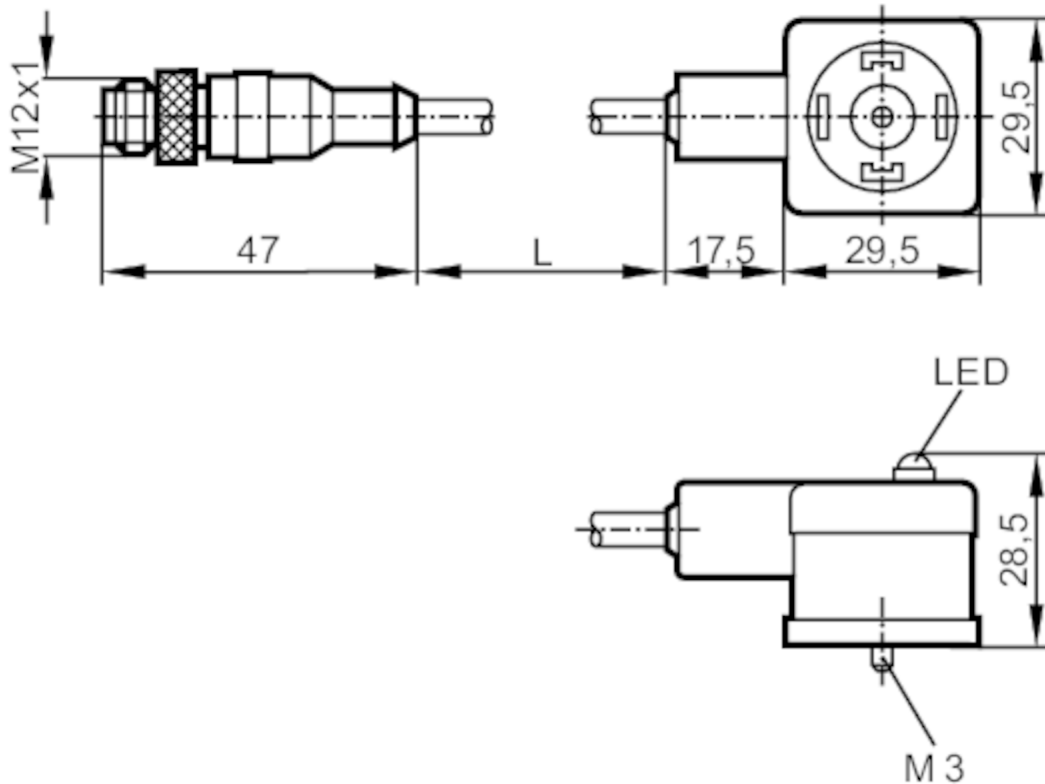

Application

Free from silicone ☐ yes ☐

Electrical data

Operating voltage [V] ☐ < 24 AC/DC ☐

Overvoltage protection ☐ free-wheeling diode ☐

Operating conditions

Ambient temperature [°C] ☐ -25...90 ☐

Protection ☐ IP 67 ☐

Mechanical data

Weight [g] ☐ 226 ☐

Materials ☐ TPU ☐

Material nut ☐ brass / brass ☐

Displays / operating elements

Display ☐ operation ☐ 1 x LED, green ☐

Accessories

Accessories (supplied) ☐ screw ☐
☐ panel for labelling ☐

Remarks

Notes ☐ discontinued article ☐

Pack quantity ☐ 1 pcs. ☐



Connection cable

STGH050MSS0004B03VDAA041--S

Electrical connection

Cable: 4 m, PUR / PVC, Halogen-free; 3 x 0.5 mm² (42 x Ø 0.1 mm)


Electrical connection - socket

Connector: 1 x valve type A DIN, angled; Moulded body: TPU; Locking: brass, nickel-plated; Contacts: nickel-plated brass




Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: TPU; Locking: brass, nickel-plated; Contacts: gold-plated



Connection

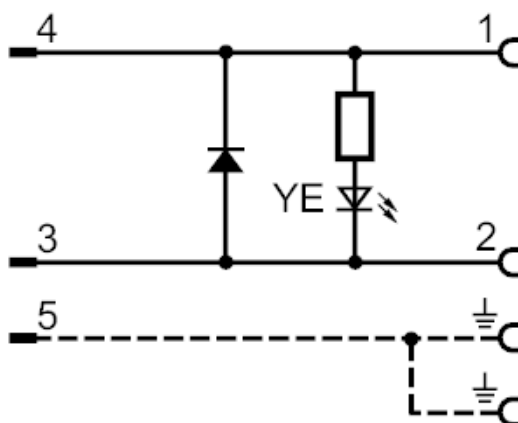

Status Archive