


E12215



Connecting cable with plug

ASTGA050MSS0006C04

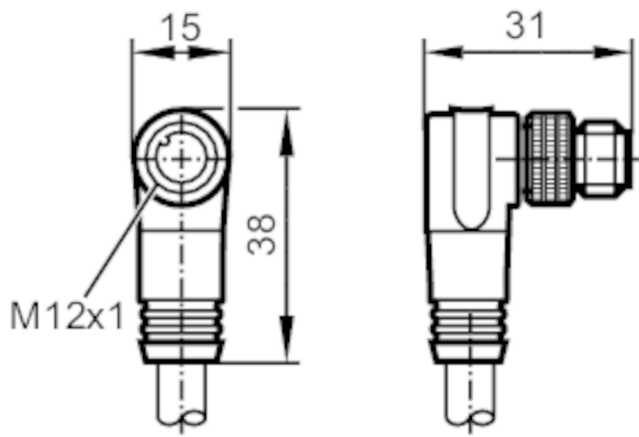


Application		
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 30 AC / < 36 DC
Protection class		II
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...90
Protection		IP 68
Mechanical data		
Weight	[g]	453.8
Dimensions	[mm]	38 x 15 x 31
Materials		housing: TPU black
Material nut		brass
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 6 m, PVC, Halogen-free, lilac, Ø 6.7 mm, shielded; 2 x 0.34 mm² / AWG 22 + 2 x 0.25 mm² / AWG 24		
Electrical connection - plug		
Connector: 1 x M12, angled; Locking: brass, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen not connected		

E12215




Connecting cable with plug

ASTGA050MSS0006C04



Connection

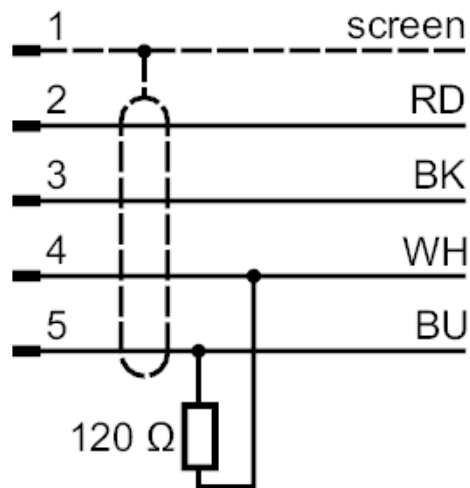

Core colours :

BK =	black
BU =	blue
RD =	red
WH =	white
screen =	screen