




Connection cable

VSTAN040ZDS0002E04STGP080--S

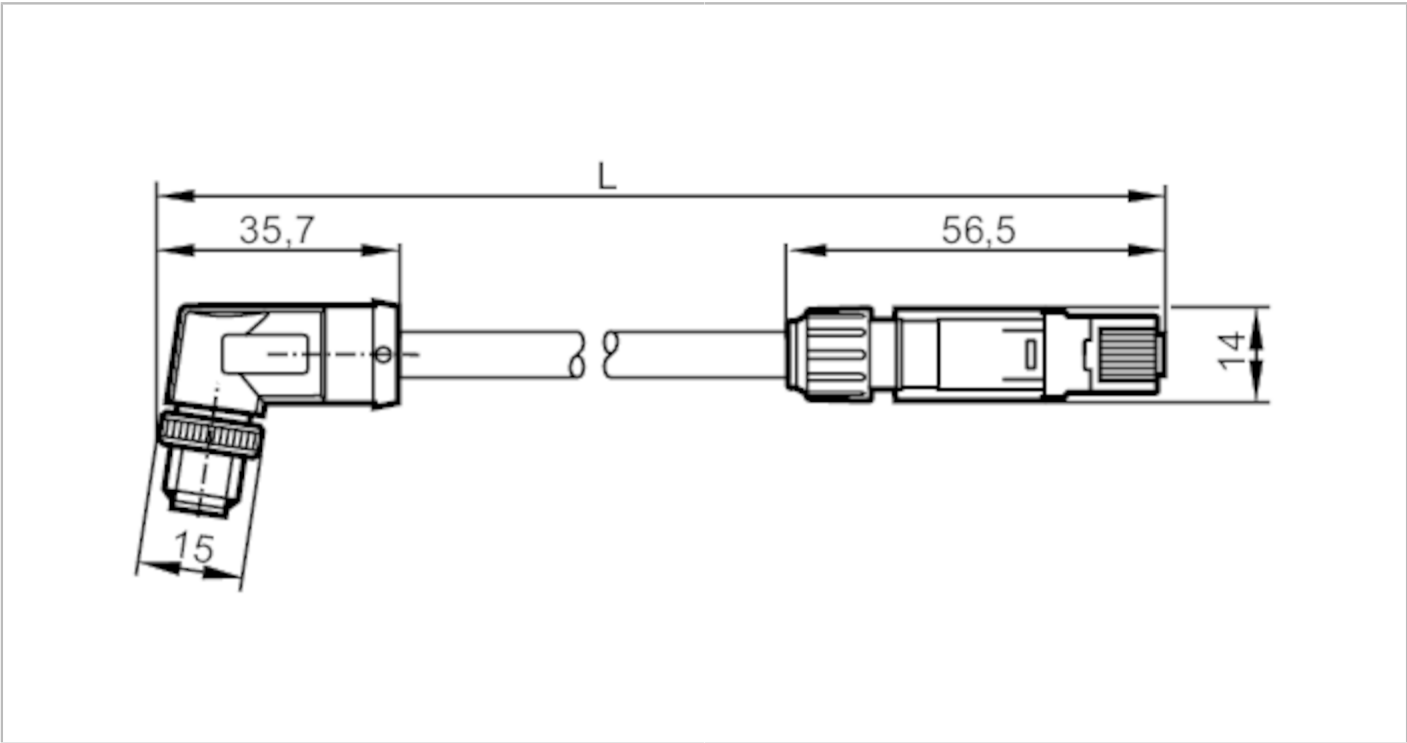

Application		
Design		Ethernet cable
Application		cross-over patch cable; patch cable
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 67; IP 42; (M12 plug / RJ45 plug)
Mechanical data		
Weight	[g]	174.6
Materials		PUR / PC
Material nut		diecast zinc
Remarks		
Pack quantity		1 pcs.

Electrical connection	
Cable: 2 m, PVC, green, Ø 6.2 mm, shielded; 4 x 0.38 mm²	

Electrical connection - plug M12

Connector: 1 x M12, angled; Moulded body: PUR; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm




E12226



Connection cable

VSTAN040ZDS0002E04STGP080--S

Connection

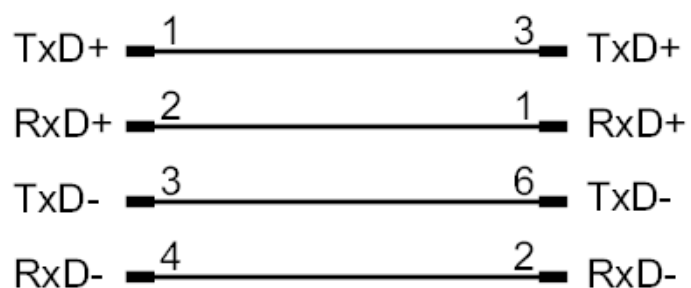

Electrical connection - plug RJ45

Connector: 1 x RJ45, straight; Moulded body: PC

