




Connection cable

VSTGN040ZDS0005G04STGP080--S

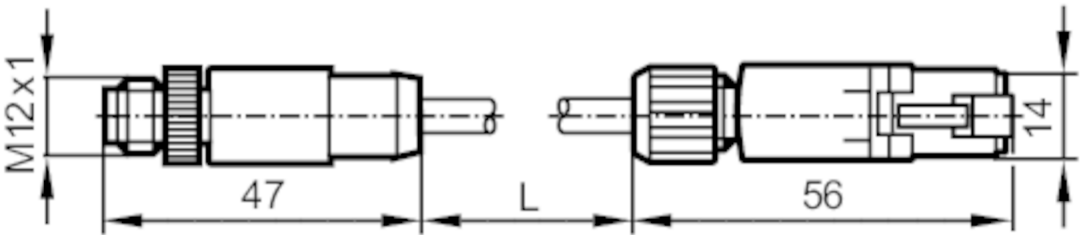

Application		
Design		Ethernet cable
Application		cross-over patch cable; patch cable
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 67; IP 42; (M12 plug / RJ45 plug)
Mechanical data		
Weight	[g]	375.4
Materials		PUR / PC
Material nut		diecast zinc
Remarks		
Pack quantity		1 pcs.

Electrical connection
Cable: 5 m, PVC, green, Ø 6.2 mm, shielded; 4 x 0.38 mm²


Electrical connection - plug M12
Connector: 1 x M12, straight; Moulded body: PUR; Locking: diecast zinc, nickel-plated; Tightening torque: 0.7...0.9 Nm



Connection cable

VSTGN040ZDS0005G04STGP080--S

Connection

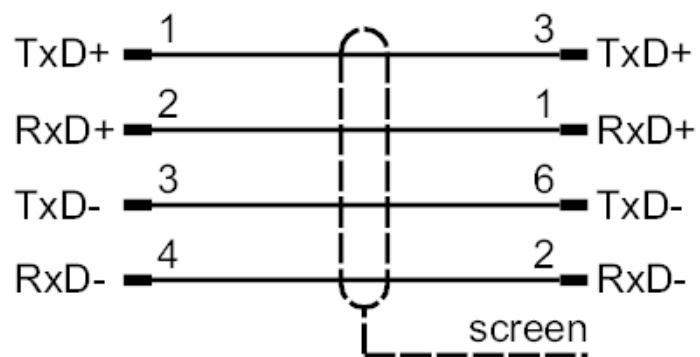

Electrical connection - plug RJ45

Connector: 1 x RJ45, straight; Moulded body: PC; Shielded connection cable: shielded

