




Wirable plug

SSTGN040ZDSFKSG

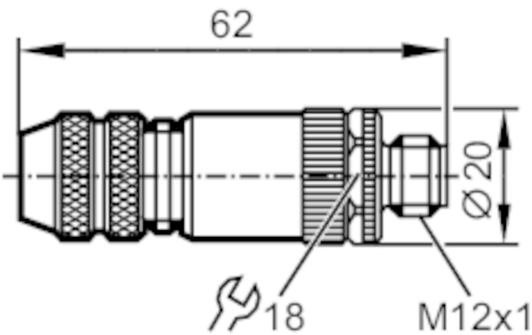

Application		
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 45 AC / < 70 DC
Max. current load total	[A]	4; (...40 °C)
Operating conditions		
Ambient temperature	[°C]	-25...85
Protection		IP 67
Mechanical data		
Weight	[g]	46
Dimensions	[mm]	20.2 x 20.2 x 63
Materials		diecast zinc nickel-plated
Material nut		diecast zinc
Remarks		
Pack quantity		1 pcs.
Electrical connection		
screw terminals: ...0.75 mm²		
Electrical connection - plug		
Connector: 1 x M12, straight; Moulded body: diecast zinc, nickel-plated; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: shieldable		

E12289



Wirable plug

SSTGN040ZDSFKSG



Connection

