


E12318



Connecting cable with plug

ASTGH020MSS0002C02

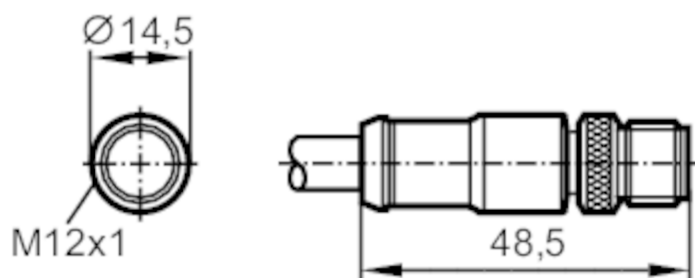

Electrical data

Operating voltage	[V]	< 30 AC / < 36 DC
Max. current load total	[A]	4; (...40 °C)

Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 67

Mechanical data

Weight	[g]	145
Dimensions	[mm]	14.5 x 14.5 x 48.5
Materials		PUR
Material nut		brass

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, PUR, Halogen-free, lilac, Ø 8 mm, shielded; 2 x 0.25 mm²

Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6 Nm;
Shielded connection cable: screen connected




E12318



Connecting cable with plug

ASTGH020MSS0002C02

Connection

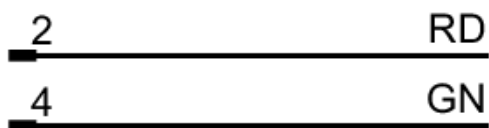

Core colours :

GN =

green

RD =

red