


E12333



Connecting cable with plug

ASTGH040MSS0010C04

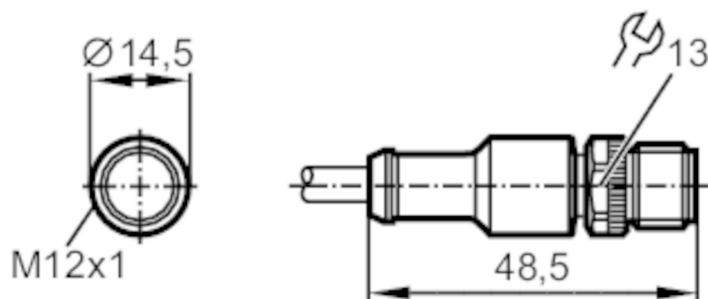

Application

Free from silicone ☐ yes ☐

Electrical data

Operating voltage [V] ☐ < 50 AC / < 60 DC ☐

Protection class ☐ III ☐

Max. current load total [A] ☐ 4 ☐

Operating conditions

Ambient temperature [°C] ☐ -25...90 ☐

Protection ☐ IP 68 ☐

Mechanical data

Weight [g] ☐ 442 ☐

Dimensions [mm] ☐ 14.5 x 14.5 x 48.4 ☐

Materials ☐ PUR ☐

Material nut ☐ diecast zinc ☐

Remarks

Pack quantity ☐ 1 pcs. ☐

Electrical connection

Cable: 10 m, PUR, Halogen-free, black, Ø 5 mm, shielded; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: PUR; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm; Shielded connection cable: screen not connected

E12333




Connecting cable with plug

ASTGH040MSS0010C04



Connection

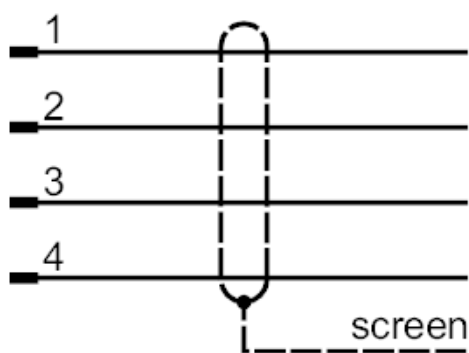

Core colours :

BK =	black
BN =	brown
BU =	blue
WH =	white