


E12339



Connecting cable with socket

ADOAH040MSS0005C04

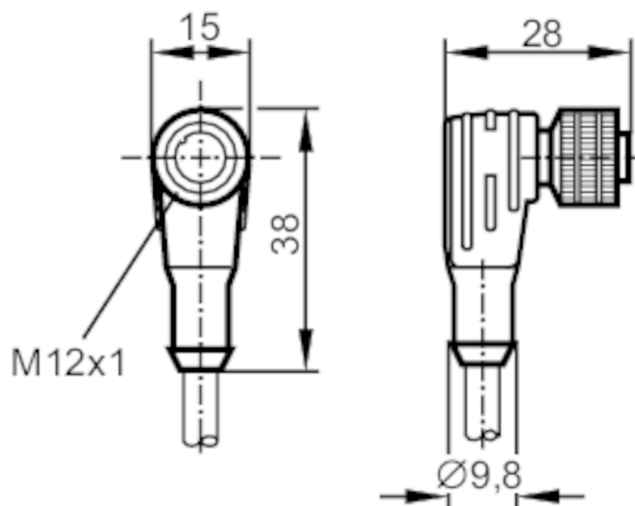

Application

Free from silicone	yes
--------------------	-----

Electrical data

Operating voltage [V]	< 50 AC / < 60 DC
Protection class	III
Max. current load total [A]	4

Operating conditions

Ambient temperature [°C]	-25...85
Note on ambient temperature	21 days: -25...120 °C
Protection	IP 67

Mechanical data

Weight	[g]	275.4	
Dimensions	[mm]	28 x 15 x 38	
Materials		TPU	
Material nut		brass	
Drag chain suitability		bending radius	min. 10 x cable diameter

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 5 m, PUR, Halogen-free, black, Ø 5 mm, shielded; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Electrical connection - socket


Connector: 1 x M12, angled; Moulded body: TPU; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm; Shielded connection cable: screen not connected

E12339




Connecting cable with socket

ADOAH040MSS0005C04



Connection

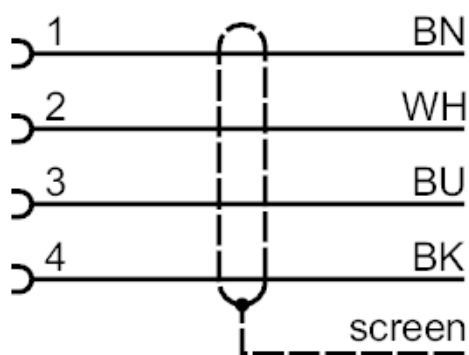

Core colours :

BK =	black
BN =	brown
BU =	blue
WH =	white