


E12340



Connecting cable with socket

ADOAH040MSS0010C04

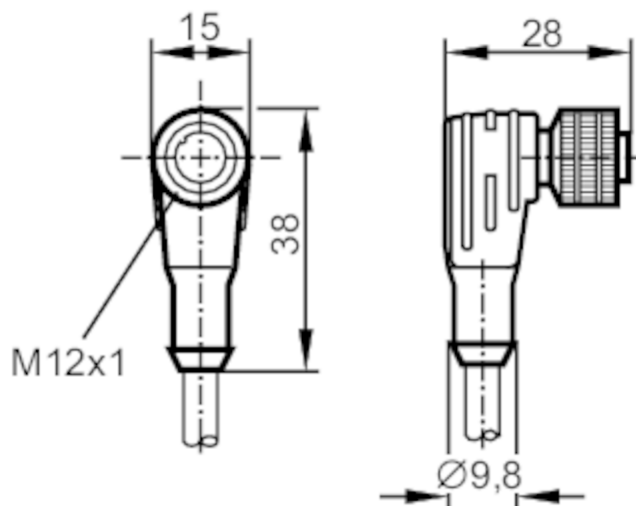

Application

Free from silicone

yes

Electrical data

Operating voltage [V] < 50 AC / < 60 DC

Protection class III

Max. current load total [A] 4

Operating conditions

Ambient temperature [°C] -40...85

Note on ambient temperature 21 days: ...120

Protection IP 67

Mechanical data

Weight [g] 521.6

Dimensions [mm] 28 x 15 x 38

Materials TPU

Material nut brass

Drag chain suitability bending radius min. 10 x cable diameter

Remarks

Pack quantity 1 pcs.

Electrical connection

Cable: 10 m, PUR, Halogen-free, black, Ø 5 mm, shielded; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Electrical connection - socket


Connector: 1 x M12, angled; Moulded body: TPU; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm; Shielded connection cable: screen not connected

E12340




Connecting cable with socket

ADOAH040MSS0010C04



Connection

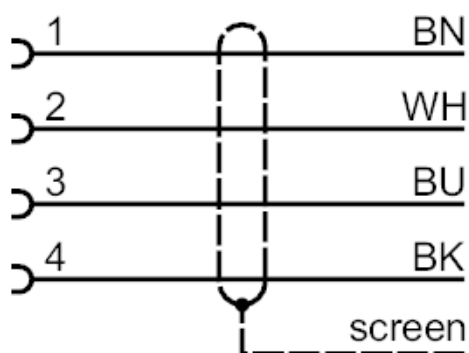

Core colours :

BK =	black
BN =	brown
BU =	blue
WH =	white