

E12351




Connecting cable with socket

ADOAH050MSS0005K05

Status Archive

EVC548

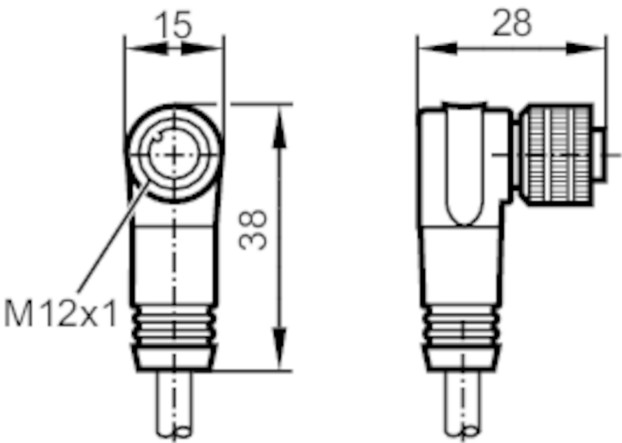


Application		
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 30 AC / < 36 DC
Protection class		III
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-40...85
Protection		IP 67
Mechanical data		
Weight	[g]	236
Dimensions	[mm]	28 x 15 x 38
Materials		PUR
Material nut		brass
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 5 m, PUR, black, Ø 5 mm, shielded; 5 x 0.25 mm² (14 x Ø 0.15 mm)		
Electrical connection - socket		
Connector: 1 x M12, angled; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 1.0...1.5 Nm; Shielded connection cable: screen connected		

E12351




Connecting cable with socket

ADOAH050MSS0005K05



Connection

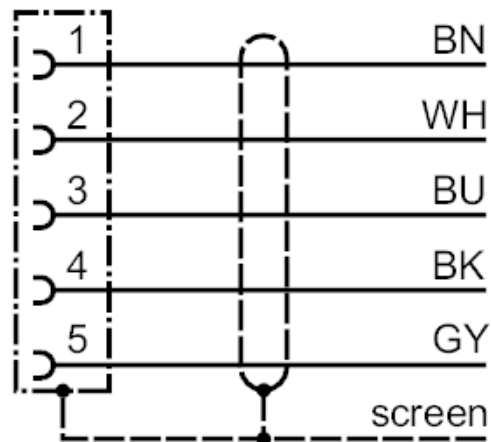

Core colours :

BK =	black
BN =	brown
BU =	blue
GY =	grey
WH =	white

Status Archive

EVC548